


POLYCAB FIRE SURVIVAL CABLES – IGNIS SERIES

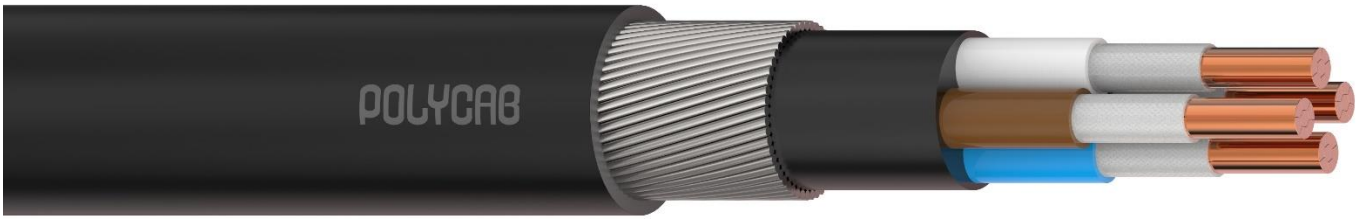

In today's building & installation, electrical cables & wires have a significant role in fire safety. Generally electrical insulation and sheathing compound catch fire unless it is fire retardant or fire resistant. This results in overheating of wires & cables arching, short circuit or electrical fault. Cables contribute significantly to the spread of fire and heat emission, increased smoke emission, increased carbon monoxide level, production & release of corrosive gasses.

Polycab IGNIS fire survival cable (low smoke halogen free – LSZH) are suitable for use in various indoor & outdoor applications where continuity of power supply during the event of fire, is highly essential and corrosive gas evaluation could be a cause of hazard to the people or the precision instruments in high rise building, schools, hospitals, hotels, Malls, Subways etc. Polycab IGNIS Fire Survival Cable conforms to various IEC and BS specification. The cables are tested in leading labs and approved by many Indian public sector company and other industries.

Polycab IGNIS fire rated cables are designed to maintain electrical continuity during high fire situation to keep essential life safety and fire-fighting equipment operational for as long as possible, to facilitate evacuation, visibility and firefighting devices to be operational.

To assess the performance of the cable under different fire load, various specifications are described. Cable performance for different levels has been described in BS 6387CWZ, BS 8434-2, BS EN 50200, BS 8491 & IEC 60331. Following construction provides Fire Survival Cable with various designs.

Conductor: High conductivity annealed plain stranded copper conductor produced in-house from state-of-the art Contirod line.

Fire Barrier Tape: Mica Glass Tape

Insulation: In-house developed high insulation resistance cross-linked polyethylene or Electron Beam Cross-linked or Silicone Rubber insulation or Cross-linked Halogen Free Flame Retardant Insulation.

Individual Shield: Where required Pairs are shielded with Aluminium. Mylar Tape along with drain wire

Laying up of Multi Cores / Pairs

Inner Covering/ Inner Sheath/ Protective Tape: A protective barrier created between insulation and armour/braid/screen by extruded layer of LSZH/FRLS PVC or protective tape

Collective Shield: Where required laidup Pairs are shielded with Aluminium. Mylar Tape along with drain wire

Armour / Metallic Braid / Screen: Galvanised Steel Round Wire / Copper Braiding / Screening is provided to allow the cable to withstand mechanical stresses to which it is exposed.

Sheath: In-house developed type FRLS PVC/LSZH/.



POLYCAB IGNIS 200
Fire Survival Cable 600/1000V AC



POLYCAB IGNIS 210
Fire Survival Cable, 600/1000V AC



POLYCAB IGNIS 220
Fire Survival Cable – Plus, 600/1000V AC



POLYCAB IGNIS 230
Fire Survival Cable – Enhanced, 600/1000V AC



POLYCAB IGNIS 211
Fire Survival Cable, 300/500V AC




POLYCAB IGNIS 212
Fire Survival Cable, 300/500V AC



POLYCAB IGNIS 213
Fire Survival Cable, 300/500V AC




POLYCAB IGNIS 214
Fire Survival Cable, 300/500V AC



POLYCAB IGNIS 215
Fire Survival Cable, 300/500V AC



POLYCAB IGNIS 240
Fire Survival Cable, 450/750V AC



POLYCAB IGNIS 241
Fire Survival Cable, 450/750V AC



POLYCAB IGNIS 242
Fire Survival Cable, 600/1000V AC

POLYCAB IGNIS 200

Fire Survival Cable, 600/1000 V AC



Outstanding Features

- High Resistant to Fire
- Reduced Flame Propagation
- Circuit Integrity when exposed to Fire
- Low Toxicity
- Fire Barrier

Application

POLYCAB FS-YL Multicore core Armoured cable is suitable to use in various indoor & outdoor applications where continuity of power supply during the event of fire, is highly essential and corrosive gas evaluation could be a cause of hazard to the people or the precision instruments in high rise building, schools, hospitals, hotels, Malls, Subways etc.

Voltage Rating

0.6/1KV

Operation Temperature

-40°C to +90°C

Short Circuit Temperature 250°C

Construction

- Annealed plain stranded copper conductor as per IEC 60228, Class-2.
- Mica Glass flame barrier tape.
- Extruded XLPE insulation.
- Insulated Cores assembled together.
- FRLS PVC Inner Sheath.
- Galvanised Steel Round Wire Armoured.
(also available with Galvanised Steel Flat Strip Armour, dimensions and weights changes accordingly)
- Extruded FRLS PVC Outer Sheath, Colour: Black.
(other colour as per request).

Core Identification

- 2 core: brown, blue;
- 3 core: brown, black, grey;
- 4 core: blue, brown, black, grey;
- 5 core: green-and-yellow, blue, brown, black, grey;
- Above 5 core can be supplied with number printing
- (All cores: optional number printing)

Bending Radius

Min. 12 x Overall Diameter

Standard Follows:

EN 60228:2005

BS 7846:2016

Test Voltage

3500 V AC at (20±5)°C

Compliance

Fire Resistant

BS 7846-F2 / BS 6387 CWZ /

BS EN 50200 (PH 60) /

BS 8434 / BS 8491 /

EN 60331-3

EN 60332-1-2

EN 60332-3-24 (Cat.C)

EN 60754-1

EN 61034-2

NES 02-713

Flame Propagation

Fire Retardant

Halogen free material

Smoke Density

Toxicity



OUR ACCREDITATION



POLYCAB IGNIS 200

Fire Survival Cable, 600/1000 V AC

DIMENSIONS AND WEIGHTS:

Product Code	No. of Cores	Cross Sectional Area (mm ²)	Nom. Insulation Thickness (mm)	Nom. Dia over Armour (mm)	Nom. Cable Overall Dia. (mm)	Cable Weight Approx. (kg / km)
FSBS07CXSWYL002C1.5SA001P	2	1.5 A)	0.60	10.9	13.5	340
FSBS07CXSWYL002C2.5SA001P	2	2.5 A)	0.70	12.1	14.9	410
FSBS07CXSWYL002C004SA001P	2	4 A)	0.70	13.2	16.0	470
FSBS07CXSWYL002C006SA001P	2	6 A)	0.70	14.3	17.2	540
FSBS07CXSWYL002C010SA001P	2	10 A)	0.70	16.2	19.2	690
FSBS07CXSWYL002C016SA001P	2	16 A)	0.70	19.0	22.0	1010
FSBS07CXSWYL002C025SA001P	2	25 A)	0.90	22.4	25.7	1330
FSBS07CXSWYL002C025SA001P	2	25 B)	0.90	18.7	22.0	1170
FSBS07CXSWYL002C035SA001P	2	35 A)	0.90	25.8	29.2	1830
FSBS07CXSWYL002C035SA001P	2	35 B)	0.90	21.4	25.0	1590
FSBS07CXSWYL002C050SA001P	2	50 B)	1.00	24.0	27.8	2030
FSBS07CXSWYL002C070SA001P	2	70 B)	1.10	26.8	30.8	2550
FSBS07CXSWYL002C095SA001P	2	95 B)	1.10	30.4	34.6	3420
FSBS07CXSWYL002C120SA001P	2	120 B)	1.20	32.1	36.5	4020
FSBS07CXSWYL002C150SA001P	2	150 B)	1.40	35.1	39.7	4780
FSBS07CXSWYL002C185SA001P	2	185 B)	1.60	39.7	44.7	6100
FSBS07CXSWYL002C240SA001P	2	240 B)	1.70	43.3	48.6	7410
FSBS07CXSWYL002C300SA001P	2	300 B)	1.80	47.4	52.8	8890
FSBS07CXSWYL002C400SA001P	2	400 B)	2.00	51.7	57.6	10660
FSBS07CXSWYL003C1.5SA001P	3	1.5 A)	0.60	11.5	14.1	385
FSBS07CXSWYL003C2.5SA001P	3	2.5 A)	0.70	12.8	15.6	470
FSBS07CXSWYL003C004SA001P	3	4 A)	0.70	14.0	16.8	550
FSBS07CXSWYL003C004SA001P	3	4 A)	0.70	14.7	17.5	655
FSBS07CXSWYL003C006SA001P	3	6 A)	0.70	15.2	18.0	650
FSBS07CXSWYL003C006SA001P	3	6 A)	0.70	15.9	18.7	760
FSBS07CXSWYL003C010SA001P	3	10 A)	0.70	17.9	20.9	970
FSBS07CXSWYL003C016SA001P	3	16 A)	0.70	20.2	23.4	1250
FSBS07CXSWYL003C025SA001P	3	25 A)	0.90	25.0	28.4	1890
FSBS07CXSWYL003C025SA001P	3	25 B)	0.90	21.5	24.9	1700
FSBS07CXSWYL003C035SA001P	3	35 A)	0.90	27.5	31.0	2300
FSBS07CXSWYL003C035SA001P	3	35 B)	0.90	23.3	26.9	2070
FSBS07CXSWYL003C050SA001P	3	50 B)	1.00	26.2	30.0	2660
FSBS07CXSWYL003C070SA001P	3	70 B)	1.10	29.3	33.1	3400
FSBS07CXSWYL003C095SA001P	3	95 B)	1.10	33.3	37.6	4580
FSBS07CXSWYL003C120SA001P	3	120 B)	1.20	36.0	40.5	5470
FSBS07CXSWYL003C150SA001P	3	150 B)	1.40	40.5	45.1	6950
FSBS07CXSWYL003C185SA001P	3	185 B)	1.60	44.6	49.4	8300
FSBS07CXSWYL003C240SA001P	3	240 B)	1.70	48.9	54.1	10210
FSBS07CXSWYL003C300SA001P	3	300 B)	1.80	53.5	58.9	12350
FSBS07CXSWYL003C400SA001P	3	400 B)	2.00	58.6	64.4	14890

Note:

A) Circular or compacted circular stranded conductor (Class 2).

B) Shaped stranded conductor (Class 2).

OUR ACCREDITATION



POLYCAB IGNIS 200

Fire Survival Cable, 600/1000 V AC

DIMENSIONS AND WEIGHTS:

Product code	No. of Cores	Cross Sectional Area (mm ²)	Nom. Insulation Thickness (mm)	Nom. Dia over Armour (mm)	Nom. Cable Overall Dia. (mm)	Cable Weight Approx. (kg / km)
FSBS07CXSWYL004C1.5SA001P	4	1.5 A)	0.60	12.5	15.1	435
FSBS07CXSWYL004C2.5SA001P	4	2.5 A)	0.70	14.0	16.7	530
FSBS07CXSWYL004C004SA001P	4	4 A)	0.70	15.3	18.1	640
FSBS07CXSWYL004C006SA001P	4	6 A)	0.70	17.3	20.3	890
FSBS07CXSWYL004C010SA001P	4	10 A)	0.70	19.6	22.6	1140
FSBS07CXSWYL004C016SA001P	4	16 A)	0.70	22.1	25.3	1470
FSBS07CXSWYL004C025SA001P	4	25 A)	0.90	27.4	30.8	2250
FSBS07CXSWYL004C025SA001P	4	25 B)	0.90	24.7	28.1	2100
FSBS07CXSWYL004C035SA001P	4	35 A)	0.90	30.2	33.7	2780
FSBS07CXSWYL004C035SA001P	4	35 B)	0.90	27.0	30.6	2580
FSBS07CXSWYL004C050SA001P	4	50 B)	1.00	30.6	34.4	3360
FSBS07CXSWYL004C070SA001P	4	70 B)	1.10	35.7	40.0	4680
FSBS07CXSWYL004C095SA001P	4	95 B)	1.10	39.3	43.7	5840
FSBS07CXSWYL004C120SA001P	4	120 B)	1.20	43.1	47.7	7420
FSBS07CXSWYL004C150SA001P	4	150 B)	1.40	47.2	52.0	8910
FSBS07CXSWYL004C185SA001P	4	185 B)	1.60	51.6	56.8	10620
FSBS07CXSWYL004C240SA001P	4	240 B)	1.70	57.1	62.5	13130
FSBS07CXSWYL004C300SA001P	4	300 B)	1.80	62.3	68.0	15890
FSBS07CXSWYL004C400SA001P	4	400 B)	2.00	70.0	76.4	20250
FSBS07CXSWYL005C1.5SA001P	5	1.5	0.60	13.5	16.3	495
FSBS07CXSWYL005C2.5SA001P	5	2.5	0.70	15.2	18.0	605
FSBS07CXSWYL005C004SA001P	5	4	0.70	16.6	19.7	740
FSBS07CXSWYL005C006SA001P	5	6	0.70	18.9	21.9	1020
FSBS07CXSWYL005C010SA001P	5	10	0.70	21.4	24.6	1330
FSBS07CXSWYL005C016SA001P	5	16	0.70	25.3	28.7	1950
FSBS07CXSWYL005C025SA001P	5	25	0.90	30.0	33.6	2650
FSBS07CXSWYL005C035SA001P	5	35	0.90	33.0	36.9	3280
FSBS07CXSWYL005C050SA001P	5	50	1.00	39.1	43.0	4640
FSBS07CXSWYL005C070SA001P	5	70	1.10	43.8	48.2	5840
FSBS07CXSWYL007C1.5SA001P	7	1.5	0.60	14.6	17.5	580
FSBS07CXSWYL012C1.5SA001P	12	1.5	0.60	19.7	22.7	990
FSBS07CXSWYL019C1.5SA001P	19	1.5	0.60	22.8	26.1	1300
FSBS07CXSWYL027C1.5SA001P	27	1.5	0.60	28.2	31.7	1920
FSBS07CXSWYL037C1.5SA001P	37	1.5	0.60	31.4	34.9	2315
FSBS07CXSWYL007C2.5SA001P	7	2.5	0.70	16.5	19.3	720
FSBS07CXSWYL012C2.5SA001P	12	2.5	0.70	22.2	25.5	1230
FSBS07CXSWYL019C2.5SA001P	19	2.5	0.70	27.0	30.5	1860
FSBS07CXSWYL027C2.5SA001P	27	2.5	0.70	32.0	36.7	2410
FSBS07CXSWYL037C2.5SA001P	37	2.5	0.70	35.7	39.4	2970
FSBS07CXSWYL007C004SA001P	7	4.0	0.70	18.8	21.8	1020
FSBS07CXSWYL012C004SA001P	12	4.0	0.70	25.6	28.8	1725
FSBS07CXSWYL019C004SA001P	19	4.0	0.70	29.7	33.2	2300
FSBS07CXSWYL027C004SA001P	27	4.0	0.70	35.3	39.2	3025
FSBS07CXSWYL037C004SA001P	37	4.0	0.70	40.7	44.8	4140

Note:

A) Circular or compacted circular stranded conductor (Class 2).

B) Shaped stranded conductor (Class 2).

OUR ACCREDITATION



POLYCAB IGNIS 200

Fire Survival Cable, 600/1000 V AC

ELECTRICAL CHARACTERISTICS:

Conductor cross-sectional area	Max. Conductor Resistance		Current Carrying Capacity (Amperes)					
			Air Ambient Temperature - 30°C Ground Ambient Temperature - 20°C Conductor operating Temperature - 90°C					
	at 20°C DC	at 90°C AC	Reference Method C (clipped direct)		Reference Method E (in free air or on a perforated cable tray etc, horizontal or vertical)		Reference Method D (direct in ground or in ducting in ground, in or around buildings)	
1 two-core cable, single-phase AC or DC			1 three- or 1 four-core cable, three-phase AC	1 two-core cable, single-phase AC or DC	1 three- or 1 four-core cable, three-phase AC	1 two-core cable, single-phase AC or DC	1 three- or 1 four-core cable, three-phase AC	
mm ²	Ohm/km		Amp.	Amp.	Amp.	Amp.	Amp.	Amp.
1.5	12.1	15.4	27	23	29	25	25	21
2.5	7.41	9.45	36	31	39	33	33	28
4	4.61	5.88	49	42	52	44	43	36
6	3.08	3.93	62	53	66	56	53	44
10	1.83	2.33	85	73	90	78	71	58
16	1.15	1.47	110	94	115	99	91	75
25	0.727	0.927	146	124	152	131	116	96
35	0.524	0.668	180	154	188	162	139	115
50	0.387	0.493	219	187	228	197	164	135
70	0.268	0.342	279	238	291	251	203	167
95	0.193	0.246	338	289	354	304	239	197
120	0.153	0.195	392	335	410	353	271	223
150	0.124	0.158	451	386	472	406	306	251
185	0.0991	0.126	515	441	539	463	343	281
240	0.0754	0.0961	607	520	636	546	395	324
300	0.0601	0.0766	698	599	732	628	446	365
400	0.0470	0.0599	787	673	847	728	-	-

The above table is in accordance with Table 4E4A of BS 7671-2018

Current rating de-rating factors for other than 30°C ambient air temperature.

Air Temperature	25	30	35	40	45	50	55	60	65	70	75	80
De-rating factor	1.02	1.00	0.96	0.91	0.87	0.82	0.76	0.71	0.65	0.58	0.50	0.41

Current rating de-rating factors for other than 20°C ground temperature.


Air Temperature	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80
De-rating factor	1.07	1.04	1.00	0.96	0.93	0.89	0.85	0.80	0.76	0.71	0.65	0.60	0.53	0.46	0.38

OUR ACCREDITATION



POLYCAB IGNIS 210

Fire Survival Cable, 600/1000 V AC

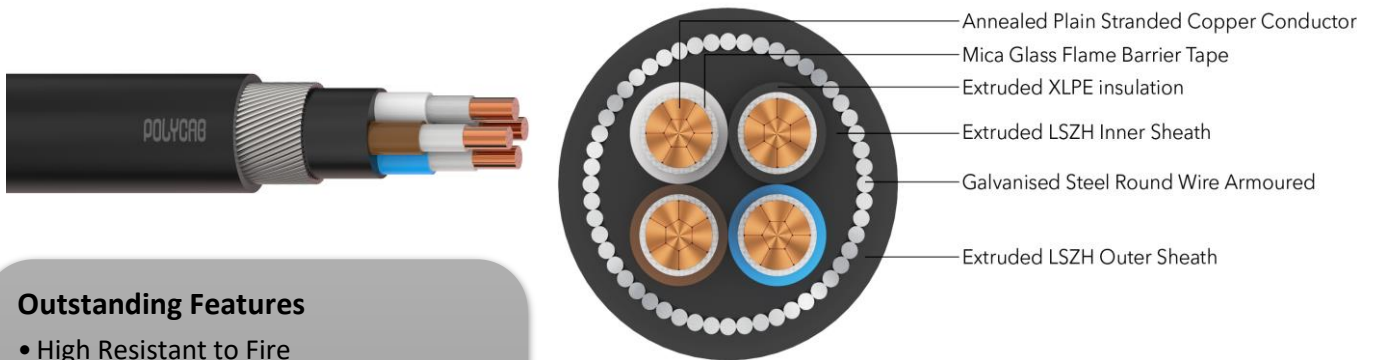

Outstanding Features

- High Resistant to Fire
- Reduced Flame Propagation
- Circuit Integrity when exposed to Fire
- Low Toxicity
- Fire Barrier

Application

POLYCAB FS Multicore core Armoured cable is suitable to use in various indoor & outdoor applications where continuity of power supply during the event of fire, is highly essential and corrosive gas evaluation could be a cause of hazard to the people or the precision instruments in high rise building, schools, hospitals, hotels, Malls, Subways etc.

Voltage Rating

0.6/1KV

Operation Temperature

-40°C to +90°C

Short Circuit Temperature 250°C

Construction

- Annealed plain stranded copper conductor as per IEC 60228, Class-2.
- Mica Glass flame barrier tape.
- Extruded XLPE insulation.
- Insulated Cores assembled together.
- Extruded LSZH Inner Sheath (FRLS Inner Sheath available on demand)
- Galvanised Steel Wire Armoured.
- Extruded LSZH Outer Sheath, Colour: Black. (FRLS Outer Sheath available on demand) (other colour as per request).

Core Identification

- 2 core: brown, blue;
- 3 core: brown, black, grey;
- 4 core: blue, brown, black, grey;
- 5 core: green-and-yellow, blue, brown, black, grey;
- Above 5 core can be supplied with number printing
- (All cores: optional number printing)

Bending Radius

Min. 12 x Overall Diameter

Standard Follows:

EN 60228:2005

BS 7846:2016

Test Voltage

3500 V AC at (20±5) °C

Compliance

Fire Resistant

BS 7846-F2 / BS 6387 CWZ /
BS EN 50200 (PH 60) /
BS 8434 / BS 8491 /
EN 60331-3

Flame Propagation

EN 60332-1-2

Fire Retardant

EN 60332-3-24 (Cat.C)

Halogen free material

EN 60754-1

Smoke Density


EN 61034-2

Toxicity

NES 02-713



OUR ACCREDITATION



POLYCAB IGNIS 210

Fire Survival Cable, 600/1000 V AC

DIMENSIONS AND WEIGHTS:

Product Code	No. of Cores	Cross Sectional Area (mm ²)	Nom. Insulation Thickness (mm)	Nom. Dia over Armour (mm)	Nom. Cable Overall Dia. (mm)	Cable Weight Approx. (kg / km)
FSBS07CXSWLS002C1.5SA001P	2	1.5 A)	0.60	10.9	13.5	340
FSBS07CXSWLS002C2.5SA001P	2	2.5 A)	0.70	12.1	14.9	410
FSBS07CXSWLS002C004SA001P	2	4 A)	0.70	13.2	16.0	470
FSBS07CXSWLS002C006SA001P	2	6 A)	0.70	14.3	17.2	540
FSBS07CXSWLS002C010SA001P	2	10 A)	0.70	16.2	19.2	690
FSBS07CXSWLS002C016SA001P	2	16 A)	0.70	19.0	22.0	1010
FSBS07CXSWLS002C025SA001P	2	25 A)	0.90	22.4	25.7	1330
FSBS07CXSWLS002C025SA001P	2	25 B)	0.90	18.7	22.0	1170
FSBS07CXSWLS002C035SA001P	2	35 A)	0.90	25.8	29.2	1830
FSBS07CXSWLS002C035SA001P	2	35 B)	0.90	21.4	25.0	1590
FSBS07CXSWLS002C050SA001P	2	50 B)	1.00	24.0	27.8	2030
FSBS07CXSWLS002C070SA001P	2	70 B)	1.10	26.8	30.8	2550
FSBS07CXSWLS002C095SA001P	2	95 B)	1.10	30.4	34.6	3420
FSBS07CXSWLS002C120SA001P	2	120 B)	1.20	32.1	36.5	4020
FSBS07CXSWLS002C150SA001P	2	150 B)	1.40	35.1	39.7	4780
FSBS07CXSWLS002C185SA001P	2	185 B)	1.60	39.7	44.7	6100
FSBS07CXSWLS002C240SA001P	2	240 B)	1.70	43.3	48.6	7410
FSBS07CXSWLS002C300SA001P	2	300 B)	1.80	47.4	52.8	8890
FSBS07CXSWLS002C400SA001P	2	400 B)	2.00	51.7	57.6	10660
FSBS07CXSWLS003C1.5SA001P	3	1.5 A)	0.60	11.5	14.1	385
FSBS07CXSWLS003C2.5SA001P	3	2.5 A)	0.70	12.8	15.6	470
FSBS07CXSWLS003C004SA001P	3	4 A)	0.70	14.0	16.8	550
FSBS07CXSWLS003C004SA001P	3	4 A)C)	0.70	14.7	17.5	655
FSBS07CXSWLS003C006SA001P	3	6 A)	0.70	15.2	18.0	650
FSBS07CXSWLS003C006SA001P	3	6 A)C)	0.70	15.9	18.7	760
FSBS07CXSWLS003C010SA001P	3	10 A)	0.70	17.9	20.9	970
FSBS07CXSWLS003C016SA001P	3	16 A)	0.70	20.2	23.4	1250
FSBS07CXSWLS003C025SA001P	3	25 A)	0.90	25.0	28.4	1890
FSBS07CXSWLS003C025SA001P	3	25 B)	0.90	21.5	24.9	1700
FSBS07CXSWLS003C035SA001P	3	35 A)	0.90	27.5	31.0	2300
FSBS07CXSWLS003C035SA001P	3	35 B)	0.90	23.3	26.9	2070
FSBS07CXSWLS003C050SA001P	3	50 B)	1.00	26.2	30.0	2660
FSBS07CXSWLS003C070SA001P	3	70 B)	1.10	29.3	33.1	3400
FSBS07CXSWLS003C095SA001P	3	95 B)	1.10	33.3	37.6	4580
FSBS07CXSWLS003C120SA001P	3	120 B)	1.20	36.0	40.5	5470
FSBS07CXSWLS003C150SA001P	3	150 B)	1.40	40.5	45.1	6950
FSBS07CXSWLS003C185SA001P	3	185 B)	1.60	44.6	49.4	8300
FSBS07CXSWLS003C240SA001P	3	240 B)	1.70	48.9	54.1	10210
FSBS07CXSWLS003C300SA001P	3	300 B)	1.80	53.5	58.9	12350
FSBS07CXSWLS003C400SA001P	3	400 B)	2.00	58.6	64.4	14890

Note:

- A) Circular or compacted circular stranded conductor (Class 2).
- B) Shaped stranded conductor (Class 2).

OUR ACCREDITATION



POLYCAB IGNIS 210

Fire Survival Cable, 600/1000 V AC

DIMENSIONS AND WEIGHTS:

Product Code	No. of Cores	Cross Sectional Area (mm ²)	Nom. Insulation Thickness (mm)	Nom. Dia over Armour (mm)	Nom. Cable Overall Dia. (mm)	Cable Weight Approx. (kg / km)
FSBS07CXSWLS004C1.5SA001P	4	1.5 A)	0.60	12.5	15.1	435
FSBS07CXSWLS004C2.5SA001P	4	2.5 A)	0.70	14.0	16.7	530
FSBS07CXSWLS004C004SA001P	4	4 A)	0.70	15.3	18.1	640
FSBS07CXSWLS004C006SA001P	4	6 A)	0.70	17.3	20.3	890
FSBS07CXSWLS004C010SA001P	4	10 A)	0.70	19.6	22.6	1140
FSBS07CXSWLS004C016SA001P	4	16 A)	0.70	22.1	25.3	1470
FSBS07CXSWLS004C025SA001P	4	25 A)	0.90	27.4	30.8	2250
FSBS07CXSWLS004C025SA001P	4	25 B)	0.90	24.7	28.1	2100
FSBS07CXSWLS004C035SA001P	4	35 A)	0.90	30.2	33.7	2780
FSBS07CXSWLS004C035SA001P	4	35 B)	0.90	27.0	30.6	2580
FSBS07CXSWLS004C050SA001P	4	50 B)	1.00	30.6	34.4	3360
FSBS07CXSWLS004C070SA001P	4	70 B)	1.10	35.7	40.0	4680
FSBS07CXSWLS004C095SA001P	4	95 B)	1.10	39.3	43.7	5840
FSBS07CXSWLS004C120SA001P	4	120 B)	1.20	43.1	47.7	7420
FSBS07CXSWLS004C150SA001P	4	150 B)	1.40	47.2	52.0	8910
FSBS07CXSWLS004C185SA001P	4	185 B)	1.60	51.6	56.8	10620
FSBS07CXSWLS004C240SA001P	4	240 B)	1.70	57.1	62.5	13130
FSBS07CXSWLS004C300SA001P	4	300 B)	1.80	62.3	68.0	15890
FSBS07CXSWLS004C400SA001P	4	400 B)	2.00	70.0	76.4	20250
FSBS07CXSWLS005C1.5SA001P	5	1.5	0.60	13.5	16.3	495
FSBS07CXSWLS005C2.5SA001P	5	2.5	0.70	15.2	18.0	605
FSBS07CXSWLS005C004SA001P	5	4	0.70	16.6	19.7	740
FSBS07CXSWLS005C004SA001P	5	4 A)	0.70	17.3	20.4	860
FSBS07CXSWLS005C006SA001P	5	6	0.70	18.9	21.9	1020
FSBS07CXSWLS005C010SA001P	5	10	0.70	21.4	24.6	1330
FSBS07CXSWLS005C016SA001P	5	16	0.70	25.3	28.7	1950
FSBS07CXSWLS005C025SA001P	5	25	0.90	30.0	33.6	2650
FSBS07CXSWLS005C035SA001P	5	35	0.90	33.0	36.9	3280
FSBS07CXSWLS005C050SA001P	5	50	1.00	39.1	43.0	4640
FSBS07CXSWLS005C070SA001P	5	70	1.10	43.8	48.2	5840
FSBS07CXSWLS007C1.5SA001P	7	1.5	0.60	14.6	17.5	580
FSBS07CXSWLS007C1.5SA001P	7	1.5 A)	0.60	15.3	18.2	690
FSBS07CXSWLS012C1.5SA001P	12	1.5	0.60	19.7	22.7	990
FSBS07CXSWLS019C1.5SA001P	19	1.5	0.60	22.8	26.1	1300
FSBS07CXSWLS027C1.5SA001P	27	1.5	0.60	28.2	31.7	1920
FSBS07CXSWLS037C1.5SA001P	37	1.5	0.60	31.4	34.9	2315
FSBS07CXSWLS007C2.5SA001P	7	2.5	0.70	16.5	19.3	720
FSBS07CXSWLS007C2.5SA001P	7	2.5 A)	0.70	17.2	20.0	840
FSBS07CXSWLS012C2.5SA001P	12	2.5	0.70	22.2	25.5	1230
FSBS07CXSWLS019C2.5SA001P	19	2.5	0.70	27.0	30.5	1860
FSBS07CXSWLS027C2.5SA001P	27	2.5	0.70	32.0	36.7	2410
FSBS07CXSWLS037C2.5SA001P	37	2.5	0.70	35.7	39.4	2970
FSBS07CXSWLS007C004SA001P	7	4.0	0.70	18.8	21.8	1020
FSBS07CXSWLS012C004SA001P	12	4.0	0.70	25.6	28.8	1725
FSBS07CXSWLS019C004SA001P	19	4.0	0.70	29.7	33.2	2300
FSBS07CXSWLS027C004SA001P	27	4.0	0.70	35.3	39.2	3025
FSBS07CXSWLS037C004SA001P	37	4.0	0.70	40.7	44.8	4140

Note:

- A) Circular or compacted circular stranded conductor (Class 2).
- B) Shaped stranded conductor (Class 2).

OUR ACCREDITATION



POLYCAB IGNIS 210

Fire Survival Cable, 600/1000 V AC

ELECTRICAL CHARACTERISTICS:

Conductor cross-sectional area	Max. Conductor Resistance		Current Carrying Capacity (Amperes)					
			Air Ambient Temperature - 30°C Ground Ambient Temperature - 20°C Conductor operating Temperature - 90°C					
	at 20°C DC	at 90°C AC	Reference Method C (clipped direct)		Reference Method E (in free air or on a perforated cable tray etc, horizontal or vertical)		Reference Method D (direct in ground or in ducting in ground, in or around buildings)	
1 two-core cable, single-phase AC or DC			1 three- or 1 four-core cable, three-phase AC	1 two-core cable, single-phase AC or DC	1 three- or 1 four-core cable, three-phase AC	1 two-core cable, single-phase AC or DC	1 three- or 1 four-core cable, three-phase AC	
mm ²	Ohm/km		Amp.	Amp.	Amp.	Amp.	Amp.	Amp.
1.5	12.1	15.4	27	23	29	25	25	21
2.5	7.41	9.45	36	31	39	33	33	28
4	4.61	5.88	49	42	52	44	43	36
6	3.08	3.93	62	53	66	56	53	44
10	1.83	2.33	85	73	90	78	71	58
16	1.15	1.47	110	94	115	99	91	75
25	0.727	0.927	146	124	152	131	116	96
35	0.524	0.668	180	154	188	162	139	115
50	0.387	0.493	219	187	228	197	164	135
70	0.268	0.342	279	238	291	251	203	167
95	0.193	0.246	338	289	354	304	239	197
120	0.153	0.195	392	335	410	353	271	223
150	0.124	0.158	451	386	472	406	306	251
185	0.0991	0.126	515	441	539	463	343	281
240	0.0754	0.0961	607	520	636	546	395	324
300	0.0601	0.0766	698	599	732	628	446	365
400	0.0470	0.0599	787	673	847	728	-	-

The above table is in accordance with Table 4E4A of BS 7671-2018

Current rating de-rating factors for other than 30°C ambient air temperature.

Air Temperature	25	30	35	40	45	50	55	60	65	70	75	80
De-rating factor	1.02	1.00	0.96	0.91	0.87	0.82	0.76	0.71	0.65	0.58	0.50	0.41

Current rating de-rating factors for other than 20°C ground temperature.


Air Temperature	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80
De-rating factor	1.07	1.04	1.00	0.96	0.93	0.89	0.85	0.80	0.76	0.71	0.65	0.60	0.53	0.46	0.38

OUR ACCREDITATION



POLYCAB IGNIS 220

Fire Survival Cable - Plus, 600/1000 V AC

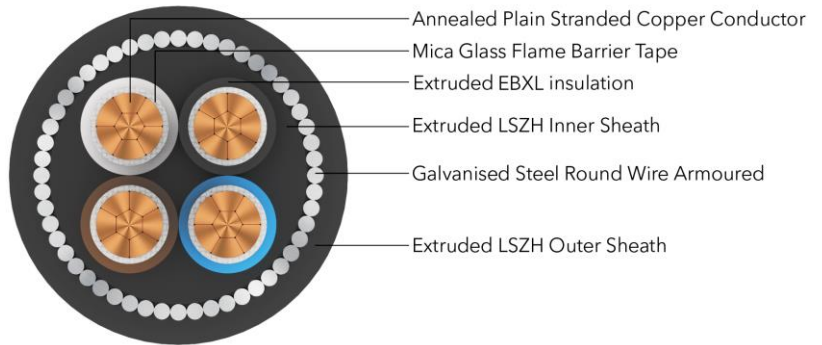

Outstanding Features

- High Resistant to Fire
- Reduced Flame Propagation
- Better Current Rating
- Circuit Integrity when exposed to Fire
- Low Toxicity
- Fire Barrier

Application

POLYCAB FS P Multicore core Armoured cable is suitable to use in various indoor & outdoor applications where continuity of power supply during the event of fire, is highly essential and corrosive gas evaluation could be a cause of hazard to the people or the precision instruments in high rise building, schools, hospitals, hotels, Malls, Subways etc.

Voltage Rating

0.6/1KV

Operation Temperature

-40°C to +105°C

Short Circuit Temperature 280°C

Construction

- Annealed plain stranded copper conductor as per IEC 60228, Class-2.
- Mica Glass flame barrier tape.
- Extruded EBXL insulation.
- Insulated Cores assembled together.
- Extruded LSZH Inner Sheath
- Galvanised Steel Wire Armoured.
- Extruded LSZH Outer Sheath, Colour: Black. (other colour as per request).

Core Identification

- 2 core: brown, blue;
- 3 core: brown, black, grey;
- 4 core: blue, brown, black, grey;
- 5 core: green-and-yellow, blue, brown, black, grey;
- Above 5 core can be supplied with number printing
- (All cores: optional number printing)

Bending Radius

Min. 12 x Overall Diameter

Standard Follows:

EN 60228:2005

BS 7846:2016

Test Voltage

3500 V AC at (20±5) °C

Compliance

Fire Resistant

BS 7846-F2 / BS 6387 CWZ /
BS EN 50200 (PH 60) /
BS 8434 / BS 8491

Flame Propagation

EN 60332-1-2

Fire Retardant

EN 60332-3-24 (Cat.C)

Halogen free material

EN 60754-1

Smoke Density

EN 61034-2

Toxicity

NES 02-713



OUR ACCREDITATION



POLYCAB IGNIS 220

Fire Survival Cable - Plus, 600/1000 V

DIMENSIONS AND WEIGHTS:

Product Code	No. of Cores	Cross Sectional Area (mm ²)	Nom. Insulation Thickness (mm)	Nom. Dia over Armour (mm)	Nom. Cable Overall Dia. (mm)	Cable Weight Approx. (kg / km)
FSBS07CLSWLS002C1.5SA001P	2	1.5 A)	0.60	10.9	13.5	350
FSBS07CLSWLS002C2.5SA001P	2	2.5 A)	0.70	12.1	14.9	420
FSBS07CLSWLS002C004SA001P	2	4 A)	0.70	13.2	16.0	480
FSBS07CLSWLS002C006SA001P	2	6 A)	0.70	14.3	17.2	555
FSBS07CLSWLS002C010SA001P	2	10 A)	0.70	16.2	19.2	705
FSBS07CLSWLS002C016SA001P	2	16 A)	0.70	19.0	22.0	1030
FSBS07CLSWLS002C025SA001P	2	25 A)	0.90	22.4	25.7	1360
FSBS07CLSWLS002C025SA001P	2	25 B)	0.90	18.7	22.0	1190
FSBS07CLSWLS002C035SA001P	2	35 A)	0.90	25.8	29.2	1860
FSBS07CLSWLS002C035SA001P	2	35 B)	0.90	21.4	25.0	1615
FSBS07CLSWLS002C050SA001P	2	50 B)	1.00	24.0	27.8	2060
FSBS07CLSWLS002C070SA001P	2	70 B)	1.10	26.8	30.8	2590
FSBS07CLSWLS002C095SA001P	2	95 B)	1.10	30.4	34.6	3465
FSBS07CLSWLS002C120SA001P	2	120 B)	1.20	32.1	36.5	4075
FSBS07CLSWLS002C150SA001P	2	150 B)	1.40	35.1	39.7	4850
FSBS07CLSWLS002C185SA001P	2	185 B)	1.60	39.7	44.7	6190
FSBS07CLSWLS002C240SA001P	2	240 B)	1.70	43.3	48.6	7515
FSBS07CLSWLS002C300SA001P	2	300 B)	1.80	47.4	52.8	9010
FSBS07CLSWLS002C400SA001P	2	400 B)	2.00	51.7	57.6	10810
FSBS07CLSWLS003C1.5SA001P	3	1.5 A)	0.60	11.5	14.1	400
FSBS07CLSWLS003C2.5SA001P	3	2.5 A)	0.70	12.8	15.6	485
FSBS07CLSWLS003C004SA001P	3	4 A)	0.70	14.0	16.8	570
FSBS07CLSWLS003C006SA001P	3	6 A)	0.70	15.2	18.0	670
FSBS07CLSWLS003C010SA001P	3	10 A)	0.70	17.9	20.9	990
FSBS07CLSWLS003C016SA001P	3	16 A)	0.70	20.2	23.4	1270
FSBS07CLSWLS003C025SA001P	3	25 A)	0.90	25.0	28.4	1930
FSBS07CLSWLS003C025SA001P	3	25 B)	0.90	21.5	24.9	1730
FSBS07CLSWLS003C035SA001P	3	35 A)	0.90	27.5	31.0	2350
FSBS07CLSWLS003C035SA001P	3	35 B)	0.90	23.3	26.9	2110
FSBS07CLSWLS003C050SA001P	3	50 B)	1.00	26.2	30.0	2710
FSBS07CLSWLS003C070SA001P	3	70 B)	1.10	29.3	33.1	3455
FSBS07CLSWLS003C095SA001P	3	95 B)	1.10	33.3	37.6	4650
FSBS07CLSWLS003C120SA001P	3	120 B)	1.20	36.0	40.5	5560
FSBS07CLSWLS003C150SA001P	3	150 B)	1.40	40.5	45.1	7060
FSBS07CLSWLS003C185SA001P	3	185 B)	1.60	44.6	49.4	8450
FSBS07CLSWLS003C240SA001P	3	240 B)	1.70	48.9	54.1	10385
FSBS07CLSWLS003C300SA001P	3	300 B)	1.80	53.5	58.9	12545
FSBS07CLSWLS003C400SA001P	3	400 B)	2.00	58.6	64.4	15145

Note:

A) Circular or compacted circular stranded conductor (Class 2).

B) Shaped stranded conductor (Class 2).

OUR ACCREDITATION



POLYCAB IGNIS 220

Fire Survival Cable - Plus, 600/1000 V AC

DIMENSIONS AND WEIGHTS:

Product Code	No. of Cores	Cross Sectional Area (mm ²)	Nom. Insulation Thickness (mm)	Nom. Dia over Armour (mm)	Nom. Cable Overall Dia. (mm)	Cable Weight Approx. (kg / km)
FSBS07CLSWLS004C1.5SA001P	4	1.5 A)	0.60	12.5	15.1	455
FSBS07CLSWLS004C2.5SA001P	4	2.5 A)	0.70	14.0	16.7	555
FSBS07CLSWLS004C004SA001P	4	4 A)	0.70	15.3	18.1	660
FSBS07CLSWLS004C006SA001P	4	6 A)	0.70	17.3	20.3	915
FSBS07CLSWLS004C010SA001P	4	10 A)	0.70	19.6	22.6	1170
FSBS07CLSWLS004C016SA001P	4	16 A)	0.70	22.1	25.3	1510
FSBS07CLSWLS004C025SA001P	4	25 A)	0.90	27.4	30.8	2305
FSBS07CLSWLS004C025SA001P	4	25 B)	0.90	24.7	28.1	2160
FSBS07CLSWLS004C035SA001P	4	35 A)	0.90	30.2	33.7	2840
FSBS07CLSWLS004C035SA001P	4	35 B)	0.90	27.0	30.6	2640
FSBS07CLSWLS004C050SA001P	4	50 B)	1.00	30.6	34.4	3440
FSBS07CLSWLS004C070SA001P	4	70 B)	1.10	35.7	40.0	4780
FSBS07CLSWLS004C095SA001P	4	95 B)	1.10	39.3	43.7	5950
FSBS07CLSWLS004C120SA001P	4	120 B)	1.20	43.1	47.7	7550
FSBS07CLSWLS004C150SA001P	4	150 B)	1.40	47.2	52.0	9080
FSBS07CLSWLS004C185SA001P	4	185 B)	1.60	51.6	56.8	10830
FSBS07CLSWLS004C240SA001P	4	240 B)	1.70	57.1	62.5	13380
FSBS07CLSWLS004C300SA001P	4	300 B)	1.80	62.3	68.0	16180
FSBS07CLSWLS004C400SA001P	4	400 B)	2.00	70.0	76.4	20610
FSBS07CLSWLS005C1.5SA001P	5	1.5	0.60	13.5	16.3	515
FSBS07CLSWLS005C2.5SA001P	5	2.5	0.70	15.2	18.0	630
FSBS07CLSWLS005C004SA001P	5	4	0.70	16.6	19.7	765
FSBS07CLSWLS005C004SA001P	5	4 A)	0.70	17.3	20.4	890
FSBS07CLSWLS005C006SA001P	5	6	0.70	18.9	21.9	1050
FSBS07CLSWLS005C010SA001P	5	10	0.70	21.4	24.6	1365
FSBS07CLSWLS005C016SA001P	5	16	0.70	25.3	28.7	1990
FSBS07CLSWLS005C025SA001P	5	25	0.90	30.0	33.6	2720
FSBS07CLSWLS005C035SA001P	5	35	0.90	33.0	36.9	3360
FSBS07CLSWLS005C050SA001P	5	50	1.00	39.1	43.0	4745
FSBS07CLSWLS005C070SA001P	5	70	1.10	43.8	48.2	5970
FSBS07CLSWLS007C1.5SA001P	7	1.5	0.60	14.6	17.5	610
FSBS07CLSWLS007C1.5SA001P	7	1.5 A)	0.60	15.3	18.2	720
FSBS07CLSWLS012C1.5SA001P	12	1.5	0.60	19.7	22.7	1030
FSBS07CLSWLS019C1.5SA001P	19	1.5	0.60	22.8	26.1	1370
FSBS07CLSWLS027C1.5SA001P	27	1.5	0.60	28.2	31.7	2010
FSBS07CLSWLS037C1.5SA001P	37	1.5	0.60	31.4	34.9	2450
FSBS07CLSWLS007C2.5SA001P	7	2.5	0.70	16.5	19.3	755
FSBS07CLSWLS007C2.5SA001P	7	2.5 A)	0.70	17.2	20.0	875
FSBS07CLSWLS012C2.5SA001P	12	2.5	0.70	22.2	25.5	1290
FSBS07CLSWLS019C2.5SA001P	19	2.5	0.70	27.0	30.5	1950
FSBS07CLSWLS027C2.5SA001P	27	2.5	0.70	32.0	36.7	2540
FSBS07CLSWLS037C2.5SA001P	37	2.5	0.70	35.7	39.4	3150
FSBS07CLSWLS007C004SA001P	7	4.0	0.70	18.8	21.8	1060
FSBS07CLSWLS012C004SA001P	12	4.0	0.70	25.6	28.8	1790
FSBS07CLSWLS019C004SA001P	19	4.0	0.70	29.7	33.2	2410
FSBS07CLSWLS027C004SA001P	27	4.0	0.70	35.3	39.2	3180
FSBS07CLSWLS037C004SA001P	37	4.0	0.70	40.7	44.8	4350

Note:

A) Circular or compacted circular stranded conductor (Class 2).

B) Shaped stranded conductor (Class 2).

OUR ACCREDITATION



POLYCAB IGNIS 220

Fire Survival Cable - Plus, 600/1000 V AC

ELECTRICAL CHARACTERISTICS:

Conductor cross-sectional area	Max. Conductor Resistance		Current Carrying Capacity (Amperes)					
			Air Ambient Temperature - 30°C Ground Ambient Temperature - 20°C Conductor operating Temperature - 105°C					
	at 20°C DC	at 90°C AC	Reference Method C (clipped direct)		Reference Method E (in free air or on a perforated cable tray etc, horizontal or vertical)		Reference Method D (direct in ground or in ducting in ground, in or around buildings)	
1 two-core cable, single-phase AC or DC			1 three- or 1 four-core cable, three-phase AC	1 two-core cable, single-phase AC or DC	1 three- or 1 four-core cable, three-phase AC	1 two-core cable, single-phase AC or DC	1 three- or 1 four-core cable, three-phase AC	
mm ²	Ohm/km		Amp.	Amp.	Amp.	Amp.	Amp.	Amp.
1.5	12.1	15.4	30	25	32	27	27	23
2.5	7.41	9.45	39	34	43	36	36	31
4	4.61	5.88	54	46	57	48	47	39
6	3.08	3.93	68	58	72	61	58	48
10	1.83	2.33	93	80	98	85	78	63
16	1.15	1.47	120	103	126	108	100	82
25	0.727	0.927	160	136	166	143	127	105
35	0.524	0.668	197	169	206	177	152	126
50	0.387	0.493	240	205	249	216	179	148
70	0.268	0.342	305	260	318	275	222	183
95	0.193	0.246	370	316	387	333	262	216
120	0.153	0.195	429	367	449	386	297	244
150	0.124	0.158	493	422	516	444	335	275
185	0.0991	0.126	563	483	590	507	375	307
240	0.0754	0.0961	664	569	696	597	432	355
300	0.0601	0.0766	764	655	801	687	488	399
400	0.0470	0.0599	861	736	927	797	-	-

The above table is in accordance with BS 7671-2018

Current rating de-rating factors for other than 30°C ambient air temperature.

Air Temperature	25	30	35	40	45	50	55	60	65	70	75	80
De-rating factor	1.02	1.00	0.96	0.91	0.87	0.82	0.76	0.71	0.65	0.58	0.50	0.41

Current rating de-rating factors for other than 20°C ground temperature.


Air Temperature	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80
De-rating factor	1.07	1.04	1.00	0.96	0.93	0.89	0.85	0.80	0.76	0.71	0.65	0.60	0.53	0.46	0.38

OUR ACCREDITATION



POLYCAB IGNIS 230

Fire Survival Cable - Enhanced, 600/1000 V

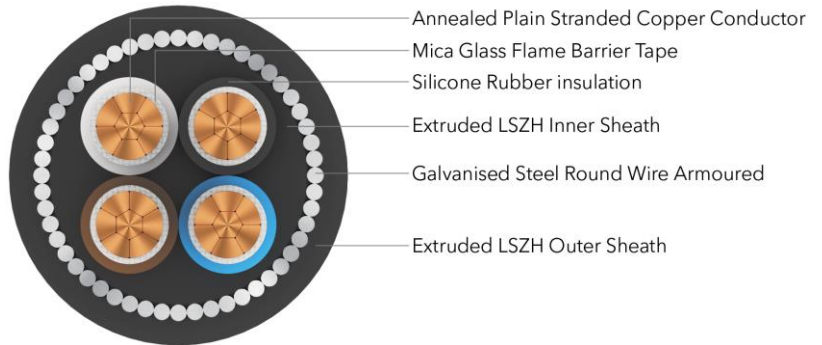

Outstanding Features

- High Resistant to Fire
- Reduced Flame Propagation
- Higher Current Rating
- Circuit Integrity when exposed to Fire
- Low Toxicity
- Fire Barrier

Application

POLYCAB FS E Multicore core Armoured cable is suitable to use in various indoor & outdoor applications where continuity of power supply during the event of fire, is highly essential and corrosive gas evaluation could be a cause of hazard to the people or the precision instruments in high rise building, schools, hospitals, hotels, Malls, Subways etc.

Voltage Rating

0.6/1KV

Operation Temperature

-40°C to +150°C

Short Circuit Temperature 350°C

Construction

- Annealed plain stranded copper conductor as per IEC 60228, Class-2.
- Mica Glass flame barrier tape.
- Extruded Silicone Rubber insulation.
- Insulated Cores assembled together.
- Extruded LSZH Inner Sheath
- Galvanised Steel Wire Armoured.
- Extruded LSZH Outer Sheath, Colour: Black. (other colour as per request).

Core Identification

- 2 core: brown, blue;
- 3 core: brown, black, grey;
- 4 core: blue, brown, black, grey;
- 5 core: green-and-yellow, blue, brown, black, grey;
- Above 5 core can be supplied with number printing
- (All cores: optional number printing)

Bending Radius

Min. 12 x Overall Diameter

Standard Follows:

EN 60228:2005

BS 7846:2016

Test Voltage

3500 V AC at (20±5) °C

Compliance

Fire Resistant

Flame Propagation

Fire Retardant

Halogen free material

Smoke Density

Toxicity

BS 7846-F2 / BS 6387 CWZ /

BS EN 50200 (PH 60) /

BS 8434 / BS 8491

EN 60332-1-2

EN 60332-3-24 (Cat.C)


EN 60754-1

EN 61034-2

NES 02-713



OUR ACCREDITATION



POLYCAB IGNIS 230

Fire Survival Cable - Enhanced, 600/1000 V

DIMENSIONS AND WEIGHTS:

Product code	No. of Cores	Cross Sectional Area (mm ²)	Nom. Insulation Thickness (mm)	Nom. Dia. over Armour (mm)	Nom. Cable Overall Dia. (mm)	Cable Weight Approx. (kg/km)
FSBS07CSSWLS002C1.5SA001P	2	1.5	0.60	10.9	13.5	345
FSBS07CSSWLS002C2.5SA001P	2	2.5	0.70	12.1	14.9	415
FSBS07CSSWLS002C004SA001P	2	4	0.70	13.2	16.0	475
FSBS07CSSWLS002C006SA001P	2	6	0.70	14.3	17.2	550
FSBS07CSSWLS002C010SA001P	2	10	0.70	16.2	19.2	700
FSBS07CSSWLS002C016SA001P	2	16	0.70	19.0	22.0	1010
FSBS07CSSWLS002C025SA001P	2	25	0.90	22.4	25.7	1345
FSBS07CSSWLS002C035SA001P	2	35	0.90	25.8	28.5	1790
FSBS07CSSWLS002C050SA001P	2	50	1.00	24.0	26.5	2245
FSBS07CSSWLS002C070SA001P	2	70	1.10	26.8	30.0	2795
FSBS07CSSWLS002C095SA001P	2	95	1.10	30.4	34.0	3770
FSBS07CSSWLS002C120SA001P	2	120	1.20	32.1	37.0	4455
FSBS07CSSWLS002C150SA001P	2	150	1.40	35.1	40.0	5290
FSBS07CSSWLS002C185SA001P	2	185	1.60	39.7	46.0	6815
FSBS07CSSWLS002C240SA001P	2	240	1.70	43.3	50.0	8225
FSBS07CSSWLS002C300SA001P	2	300	1.80	47.4	55.0	9790
FSBS07CSSWLS002C400SA001P	2	400	2.00	51.7	60.0	12250
FSBS07CSSWLS003C1.5SA001P	3	1.5	0.60	11.5	14.1	390
FSBS07CSSWLS003C2.5SA001P	3	2.5	0.70	12.8	15.6	480
FSBS07CSSWLS003C004SA001P	3	4	0.70	14.0	16.8	560
FSBS07CSSWLS003C006SA001P	3	6	0.70	15.2	18.0	660
FSBS07CSSWLS003C010SA001P	3	10	0.70	17.9	20.9	980
FSBS07CSSWLS003C016SA001P	3	16	0.70	20.2	23.4	1255
FSBS07CSSWLS003C025SA001P	3	25	0.90	25.0	28.4	1910
FSBS07CSSWLS003C035SA001P	3	35	0.90	27.5	31.0	2330
FSBS07CSSWLS003C050SA001P	3	50	1.00	26.2	32.5	2835
FSBS07CSSWLS003C070SA001P	3	70	1.10	29.3	36.5	3600
FSBS07CSSWLS003C095SA001P	3	95	1.10	33.3	41.5	4885
FSBS07CSSWLS003C120SA001P	3	120	1.20	36.0	45.0	5825
FSBS07CSSWLS003C150SA001P	3	150	1.40	40.5	50.0	7450
FSBS07CSSWLS003C185SA001P	3	185	1.60	44.6	55.0	8840
FSBS07CSSWLS003C240SA001P	3	240	1.70	48.9	60.5	10860
FSBS07CSSWLS003C300SA001P	3	300	1.80	53.5	66.0	13020
FSBS07CSSWLS003C400SA001P	3	400	2.00	58.6	73.5	16485

OUR ACCREDITATION



POLYCAB IGNIS 230

Fire Survival Cable - Enhanced, 600/1000 V

DIMENSIONS AND WEIGHTS:

Product code	No. of Cores	Cross Sectional Area (mm ²)	Nom. Insulation Thickness (mm)	Nom. Dia. over Armour (mm)	Nom. Cable Overall Dia. (mm)	Cable Weight Approx. (kg/km)
FSBS07CSSWLS004C1.5SA001P	4	1.5	0.60	12.5	15.1	445
FSBS07CSSWLS004C2.5SA001P	4	2.5	0.70	14.0	16.7	545
FSBS07CSSWLS004C004SA001P	4	4	0.70	15.3	18.1	650
FSBS07CSSWLS004C006SA001P	4	6	0.70	17.3	20.3	900
FSBS07CSSWLS004C010SA001P	4	10	0.70	19.6	22.6	1155
FSBS07CSSWLS004C016SA001P	4	16	0.70	22.1	25.3	1490
FSBS07CSSWLS004C025SA001P	4	25	0.90	27.4	30.8	2280
FSBS07CSSWLS004C035SA001P	4	35	0.90	30.2	33.7	2810
FSBS07CSSWLS004C050SA001P	4	50	1.00	30.6	35.0	3460
FSBS07CSSWLS004C070SA001P	4	70	1.10	35.7	40.5	4800
FSBS07CSSWLS004C095SA001P	4	95	1.10	39.3	44.5	5995
FSBS07CSSWLS004C120SA001P	4	120	1.20	43.1	50.0	7685
FSBS07CSSWLS004C150SA001P	4	150	1.40	47.2	54.5	9225
FSBS07CSSWLS004C185SA001P	4	185	1.60	51.6	59.5	10985
FSBS07CSSWLS004C240SA001P	4	240	1.70	57.1	66.0	13575
FSBS07CSSWLS004C300SA001P	4	300	1.80	62.3	71.5	16340
FSBS07CSSWLS004C400SA001P	4	400	2.00	70.0	82.0	21895
FSBS07CSSWLS005C1.5SA001P	5	1.5	0.60	13.5	16.3	510
FSBS07CSSWLS005C2.5SA001P	5	2.5	0.70	15.2	18.0	620
FSBS07CSSWLS005C004SA001P	5	4	0.70	16.6	19.7	750
FSBS07CSSWLS005C006SA001P	5	6	0.70	18.9	21.9	1040
FSBS07CSSWLS005C010SA001P	5	10	0.70	21.4	24.6	1350
FSBS07CSSWLS005C016SA001P	5	16	0.70	25.3	28.7	1970
FSBS07CSSWLS005C025SA001P	5	25	0.90	30.0	33.6	2690
FSBS07CSSWLS005C035SA001P	5	35	0.90	33.0	36.9	3330
FSBS07CSSWLS005C050SA001P	5	50	1.00	39.1	43.0	4700
FSBS07CSSWLS005C070SA001P	5	70	1.10	43.8	48.2	5910
FSBS07CSSWLS007C1.5SA001P	7	1.5	0.60	14.6	17.5	600
FSBS07CSSWLS012C1.5SA001P	12	1.5	0.60	19.7	22.7	1010
FSBS07CSSWLS019C1.5SA001P	19	1.5	0.60	22.8	26.1	1340
FSBS07CSSWLS027C1.5SA001P	27	1.5	0.60	28.2	31.7	1970
FSBS07CSSWLS037C1.5SA001P	37	1.5	0.60	31.4	34.9	2390
FSBS07CSSWLS007C2.5SA001P	7	2.5	0.70	16.5	19.3	740
FSBS07CSSWLS012C2.5SA001P	12	2.5	0.70	22.2	25.5	1260
FSBS07CSSWLS019C2.5SA001P	19	2.5	0.70	27.0	30.5	1910
FSBS07CSSWLS027C2.5SA001P	27	2.5	0.70	32.0	36.7	2480
FSBS07CSSWLS037C2.5SA001P	37	2.5	0.70	35.7	39.4	3060
FSBS07CSSWLS007C004SA001P	7	4.0	0.70	18.8	21.8	1040
FSBS07CSSWLS012C004SA001P	12	4.0	0.70	25.6	28.8	1760
FSBS07CSSWLS019C004SA001P	19	4.0	0.70	29.7	33.2	2360
FSBS07CSSWLS027C004SA001P	27	4.0	0.70	35.3	39.2	3110
FSBS07CSSWLS037C004SA001P	37	4.0	0.70	40.7	44.8	4255

OUR ACCREDITATION



POLYCAB IGNIS 230

Fire Survival Cable - Enhanced, 600/1000 V AC

ELECTRICAL CHARACTERISTICS:

Conductor cross-sectional area	Max. Conductor Resistance		Current Carrying Capacity (Amperes)					
			Air Ambient Temperature - 30°C Ground Ambient Temperature - 20°C Conductor operating Temperature - 150°C					
	at 20°C DC	at 90°C AC	Reference Method C (clipped direct)		Reference Method E (in free air or on a perforated cable tray etc, horizontal or vertical)		Reference Method D (direct in ground or in ducting in ground, in or around buildings)	
1 two-core cable, single-phase AC or DC			1 three- or 1 four-core cable, three-phase AC	1 two-core cable, single-phase AC or DC	1 three- or 1 four-core cable, three-phase AC	1 two-core cable, single-phase AC or DC	1 three- or 1 four-core cable, three-phase AC	
mm ²	Ohm/km		Amp.	Amp.	Amp.	Amp.	Amp.	Amp.
1.5	12.1	15.4	35	30	38	33	33	27
2.5	7.41	9.45	47	40	51	43	43	37
4	4.61	5.88	64	55	68	57	56	47
6	3.08	3.93	81	69	86	73	69	57
10	1.83	2.33	111	95	117	102	93	76
16	1.15	1.47	143	123	150	129	119	98
25	0.727	0.927	190	162	198	171	151	125
35	0.524	0.668	235	201	245	211	181	150
50	0.387	0.493	286	244	297	257	214	176
70	0.268	0.342	364	310	379	327	265	218
95	0.193	0.246	441	377	462	396	312	257
120	0.153	0.195	511	437	535	460	353	291
150	0.124	0.158	588	503	615	529	399	327
185	0.0991	0.126	671	575	703	604	447	366
240	0.0754	0.0961	791	678	829	712	515	422
300	0.0601	0.0766	910	781	954	819	582	476
400	0.0470	0.0599	1026	877	1104	949	-	-

The above table is in accordance with BS 7671-2018

Current rating de-rating factors for other than 30°C ambient air temperature.

Air Temperature	25	30	35	40	45	50	55	60	65	70	75	80
De-rating factor	1.02	1.00	0.96	0.91	0.87	0.82	0.76	0.71	0.65	0.58	0.50	0.41

Current rating de-rating factors for other than 20°C ground temperature.


Air Temperature	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80
De-rating factor	1.07	1.04	1.00	0.96	0.93	0.89	0.85	0.80	0.76	0.71	0.65	0.60	0.53	0.46	0.38

OUR ACCREDITATION



POLYCAB IGNIS 211

Fire Survival Cable, 300/500 V AC

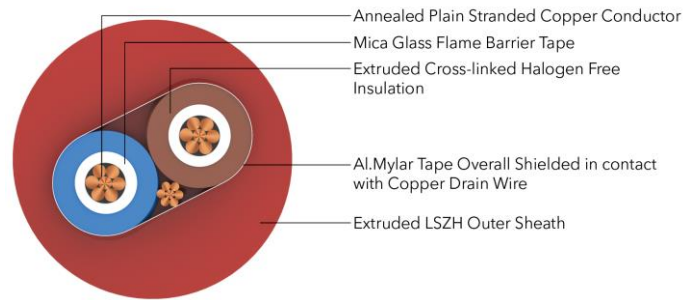

Outstanding Features

- High Resistant to Fire
- Reduced Flame Propagation
- Circuit Integrity when exposed to Fire
- Low Toxicity
- Fire Barrier

Application

POLYCAB FS Multicore Shielded cable is suitable to use in various indoor & outdoor applications where control supply to the emergency devices during the event of fire, is highly essential and corrosive gas evaluation could be a cause of hazard to the people in high rise building, schools, hospitals, hotels, Malls, Subways etc.

Voltage Rating

300/500V AC

Operation Temperature

-40°C to +90°C

Short Circuit Temperature 250°C

Construction

- Annealed plain stranded copper conductor as per IEC 60228, Class-2.
- Mica Glass flame barrier tape.
- Extruded Cross-linked Halogen Free insulation.
- Insulated Cores assembled together.
- Al.Mylar Tape Overall Shielded along with Drain wire
- Extruded LSZH Outer Sheath, Colour: Red or White (other colour as per request).

Core Identification

- 2 core: Brown, blue;
- 3 core: Brown, black, grey;
- 4 core: Blue, brown, black, grey;
- 5 core: green-and-yellow, blue, brown, black, grey;
- 7 cores: Centre- Brown, 1st layer: Brown, Black & remaining 4 cores white
- 12 cores: Centre- Brown, Black, White, 1st layer: Brown, Black & remaining 7 cores white
- 19 cores: Centre- Brown, 1st layer: Brown, Black & remaining 4 cores white, 2nd layer: Brown, Black & remaining 10 cores white

Bending Radius

Min. 6 x Overall Diameter

Standard Follows:

EN 60228:2005

BS 7629-1:2015

Test Voltage

2000 V AC at (20±5)°C

Compliance

Fire Resistant

BS 7629-1 / BS 6387 CWZ /

BS EN 50200 (PH 120) /

BS 8434 / EN 60331-3

Flame Propagation

EN 60332-1-2

Fire Retardant

EN 60332-3-24 (Cat.C)

Halogen free material

EN 60754-1

Smoke Density



EN 61034-2

Toxicity

NES 02-713



OUR ACCREDITATION



POLYCAB IGNIS 211

Fire Survival Cable, 300/500 V AC

DIMENSIONS AND WEIGHTS:

Product code	No. of Cores	Cross Sectional Area (mm ²)	Nom. Insulation Thickness (mm)	Nom. Cable Overall Dia. (mm)	Approx. Cable Weight Approx. (kg / km)
Solid					
FSBS04CLUALS002C1.0SA001P	2	1.0	0.60	7.9	80
FSBS04CLUALS002C1.5SA001P	2	1.5	0.70	8.8	105
FSBS04CLUALS002C2.5SA001P	2	2.5	0.80	10.1	145
FSBS04CLUALS003C1.0SA001P	3	1.0	0.60	8.4	100
FSBS04CLUALS003C1.5SA001P	3	1.5	0.70	9.3	130
FSBS04CLUALS003C2.5SA001P	3	2.5	0.80	10.8	185
FSBS04CLUALS004C1.0SA001P	4	1.0	0.60	9.3	125
FSBS04CLUALS004C1.5SA001P	4	1.5	0.70	10.4	165
FSBS04CLUALS004C2.5SA001P	4	2.5	0.80	12.0	230
FSBS04CLUALS007C1.0SA001P	7	1.0	0.60	11.1	180
FSBS04CLUALS007C1.5SA001P	7	1.5	0.70	12.6	245
FSBS04CLUALS007C2.5SA001P	7	2.5	0.80	14.5	340
FSBS04CLUALS012C1.0SA001P	12	1.0	0.60	14.9	300
FSBS04CLUALS012C1.5SA001P	12	1.5	0.70	16.8	395
FSBS04CLUALS012C2.5SA001P	12	2.5	0.80	20.0	570
FSBS04CLUALS019C1.0SA001P	19	1.0	0.60	17.4	440
FSBS04CLUALS019C1.5SA001P	19	1.5	0.70	19.8	595
Stranded					
FSBS04CLUALS002C1.0SA001P	2	1.0	0.60	8.2	85
FSBS04CLUALS002C1.5SA001P	2	1.5	0.70	9.2	110
FSBS04CLUALS002C2.5SA001P	2	2.5	0.80	10.7	150
FSBS04CLUALS002C4.0SA001P	2	4.0	0.80	11.9	210
FSBS04CLUALS003C1.0SA001P	3	1.0	0.60	9.7	110
FSBS04CLUALS003C1.5SA001P	3	1.5	0.70	9.8	135
FSBS04CLUALS003C2.5SA001P	3	2.5	0.80	11.3	190
FSBS04CLUALS003C4.0SA001P	3	4.0	0.80	12.7	270
FSBS04CLUALS004C1.0SA001P	4	1.0	0.60	9.7	135
FSBS04CLUALS004C1.5SA001P	4	1.5	0.70	10.9	170
FSBS04CLUALS004C2.5SA001P	4	2.5	0.80	12.6	245
FSBS04CLUALS004C4.0SA001P	4	4.0	0.80	14.1	340

ELECTRICAL CHARACTERISTICS:

Conductor cross sectional area	Max. Conductor Resistance		Current Carrying Capacity (Amperes)							
			Air Ambient Temperature - 30°C Conductor operating Temperature - 90°C							
			Reference Method A (enclosed in conduit in thermally insulating wall etc)		Reference Method B (enclosed in conduit on a wall or in trunking etc)		Reference Method C (clipped direct)		Reference Method E (free air or on a perforated cable tray etc, horizontal or vertical)	
at 20°C DC	at 90°C AC	1 two core cable* single phase a.c or d.c	3 or 4 core cables* three phase a.c	2 core cable* single phase a.c or d.c	3 or 4 core cable* three phase a.c	2 core cable* single phase a.c or d.c	3 or 4 core cable* three phase a.c	2 core cable* single phase a.c or d.c	3 or 4 core cable* three phase a.c	
(mm ²)	(Ohm/km)	(Ohm/km)	Amp.	Amp.	Amp.	Amp.	Amp.	Amp.	Amp.	Amp.
1.0	18.1	23.1	14.5	13	17	15	19	17	21	18
1.5	12.1	15.4	18.5	16.5	22	19.5	24	22	26	23
2.5	7.41	9.45	25	22	30	26	33	30	36	32
4.0	4.61	5.88	33	30	40	35	45	40	49	42

The above table is in accordance with Table 4E2A of BS 7671-2018

Current rating de-rating factors for other than 30°C ambient air temperature.


Air Temperature	25	30	35	40	45	50	55	60	65	70	75	80
De-rating factor	1.02	1.00	0.96	0.91	0.87	0.82	0.76	0.71	0.65	0.58	0.50	0.41

OUR ACCREDITATION



POLYCAB IGNIS 212

Fire Survival Cable, 300/500 V AC

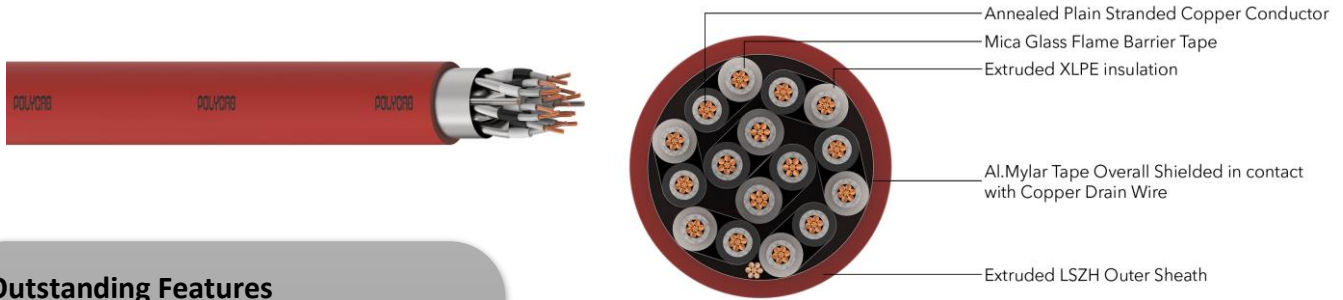

Outstanding Features

- High Resistant to Fire
- Reduced Flame Propagation
- Circuit Integrity when exposed to Fire
- Low Toxicity
- Fire Barrier

Application

POLYCAB FS Multipair Shielded cable is suitable to use in various indoor & outdoor applications where signal transmission during the event of fire, is highly essential and corrosive gas evaluation could be a cause of hazard to the people in high rise building, schools, hospitals, hotels, Malls, Subways etc.

Voltage Rating

300/500V AC

Operation Temperature

-40°C to +90°C

Construction

- Annealed plain stranded copper conductor as per IEC 60228, Class-2.
- Mica Glass flame barrier tape.
- Extruded XLPE insulation.
- Insulated Cores twisted to form pairs and assembled together.
- Al.Mylar Tape Overall Shielded in contact with Drain wire
- Extruded LSZH Outer Sheath, Colour: Red or White (other colour as per request).

Core Identification

- Colour Coding or Number Printing
As per BS EN 50288-7

Bending Radius

Min. 12 x Overall Diameter

Standard Follows:

EN 60228:2005

Generally conforming to BS 7629-1:2015

Test Voltage

2000 V AC at (20±5) °C

Compliance

Fire Resistant	IEC 60331-23
Flame Propagation	EN 60332-1-2
Fire Retardant	EN 60332-3-24 (Cat.C)
Halogen free material	EN 60754-1
Smoke Density	EN 61034-2
Toxicity	NES 02-713



OUR ACCREDITATION



POLYCAB IGNIS 212

Fire Survival Cable, 300/500 V AC

DIMENSIONS AND WEIGHTS:

Product code	No. of Pairs	No. of Cores	Cross Sectional Area (mm ²)	Min. Insulation Thickness (mm)	Approx. Cable Overall Dia. (mm)	Cable Weight Approx. (kg / km)
FSBS04CXUALS001P.75SA001P	1	2	0.75	0.44	7.60	65
FSBS04CXUALS002P.75SA001P	2	4	0.75	0.44	10.9	120
FSBS04CXUALS005P.75SA001P	5	10	0.75	0.44	14.6	215
FSBS04CXUALS010P.75SA001P	10	20	0.75	0.44	20.3	390
FSBS04CXUALS015P.75SA001P	15	30	0.75	0.44	24.3	545
FSBS04CXUALS020P.75SA001P	20	40	0.75	0.44	27.4	695
FSBS04CXUALS001P1.0SA001P	1	2	1.0	0.44	8.10	75
FSBS04CXUALS002P1.0SA001P	2	4	1.0	0.44	11.6	135
FSBS04CXUALS005P1.0SA001P	5	10	1.0	0.44	15.5	260
FSBS04CXUALS010P1.0SA001P	10	20	1.0	0.44	21.5	460
FSBS04CXUALS015P1.0SA001P	15	30	1.0	0.44	25.8	655
FSBS04CXUALS020P1.0SA001P	20	40	1.0	0.44	29.3	845
FSBS04CXUALS001P1.5SA001P	1	2	1.5	0.44	8.90	90
FSBS04CXUALS002P1.5SA001P	2	4	1.5	0.44	12.9	170
FSBS04CXUALS005P1.5SA001P	5	10	1.5	0.44	17.4	335
FSBS04CXUALS010P1.5SA001P	10	20	1.5	0.44	24.3	610
FSBS04CXUALS015P1.5SA001P	15	30	1.5	0.44	29.2	865
FSBS04CXUALS020P1.5SA001P	20	40	1.5	0.44	33.0	1125

ELECTRICAL CHARACTERISTICS:


Cross Sectional Area (mm ²)	Conductor Resistance (Ohms/Km)		Insulation Resistance (MOhms-Km)	Approx. Capacitance (nF/km)	Approx. Inductance to Resistance ratio, L/R (μH/Ohm)
	Single pair	Multi pair			
0.75	34.5	35.2	1000	150	25
1.0	18.1	18.5	1000	150	25
1.5	12.1	12.3	1000	150	40

OUR ACCREDITATION



POLYCAB IGNIS 213

Fire Survival Cable, 300/500 V AC

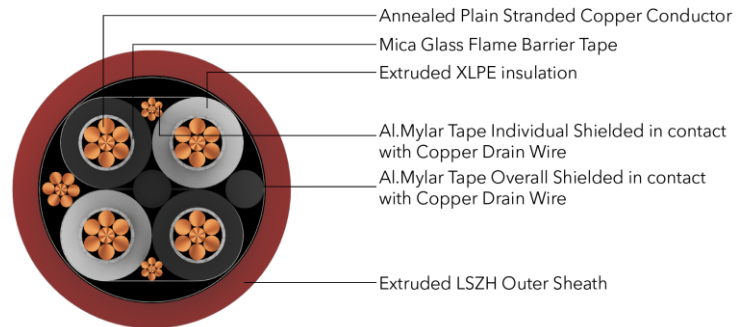

Outstanding Features

- High Resistant to Fire
- Reduced Flame Propagation
- Circuit Integrity when exposed to Fire
- Low Toxicity
- Fire Barrier

Application

POLYCAB FS Multipair Individual & Overall Shielded cable is suitable to use in various indoor & outdoor applications where signal transmission during the event of fire, is highly essential and corrosive gas evaluation could be a cause of hazard to the people in high rise building, schools, hospitals, hotels, Malls, Subways etc.

Voltage Rating

300/500V AC

Operation Temperature

-40°C to +90°C

Construction

- Annealed plain stranded copper conductor as per IEC 60228, Class-2.
- Mica Glass flame barrier tape.
- Extruded XLPE insulation.
- Insulated Cores twisted to form pairs
- Al.Mylar Tape Individual Shielded in contact with Drain wire
- Shielded Pairs assembled together
- Al.Mylar Tape Overall Shielded in contact with Drain wire
- Extruded LSZH Outer Sheath, Colour: Red or White (other colour as per request).

Bending Radius

Min. 12 x Overall Diameter

Standard Follows:

EN 60228:2005

Generally conforming to BS 7629-1:2015

Test Voltage

2000 V AC at (20±5)°C

Compliance



Fire Resistant	EN 50200 PH 120
Flame Propagation	EN 60332-1-2
Fire Retardant	EN 60332-3-24 (Cat.C)
Halogen free material	EN 60754-1
Smoke Density	EN 61034-2
Toxicity	NES 02-713

Core Identification

- Colour Coding or Number Printing



OUR ACCREDITATION



POLYCAB IGNIS 213

Fire Survival Cable, 300/500 V AC

DIMENSIONS AND WEIGHTS:

Product code	No. of Pairs	No. of Cores	Cross Sectional Area (mm ²)	Min. Insulation Thickness (mm)	Approx. Cable Overall Dia. (mm)	Cable Weight Approx. (kg / km)
FSBS04CXUALS001P0.5SA001P	1	2	0.50	0.45	6.70	60
FSBS04CXUALS002P0.5SA001P	2	4	0.50	0.45	10.8	120
FSBS04CXUALS001P.75SA001P	1	2	0.75	0.45	7.10	70
FSBS04CXUALS002P.75SA001P	2	4	0.75	0.45	11.5	135
FSBS04CXUALS001P1.0SA001P	1	2	1.0	0.45	7.50	80
FSBS04CXUALS002P1.0SA001P	2	4	1.0	0.45	12.1	155
FSBS04CXUALS001P1.5SA001P	1	2	1.5	0.45	8.10	95
FSBS04CXUALS002P1.5SA001P	2	4	1.5	0.45	13.4	190
FSBS04CXUALS001P2.5SA001P	1	2	2.5	0.5	9.20	120
FSBS04CXUALS002P2.5SA001P	2	4	2.5	0.5	14.8	265

ELECTRICAL CHARACTERISTICS:


Cross Sectional Area (mm ²)	Conductor Resistance (Ohms/Km)		Insulation Resistance (MOhms-Km)	Approx. Capacitance (nF/km)	Approx. Inductance to Resistance ratio, L/R (μH/Ohm)
	Single pair	Multi pair			
0.50	36	36.7	1000	150	25
0.75	34.5	35.2	1000	150	25
1.0	18.1	18.5	1000	150	25
1.5	12.1	12.3	1000	150	40
2.5	7.41	7.56	1000	150	40

OUR ACCREDITATION



POLYCAB IGNIS 214

Fire Survival Cable, 300/500 V AC

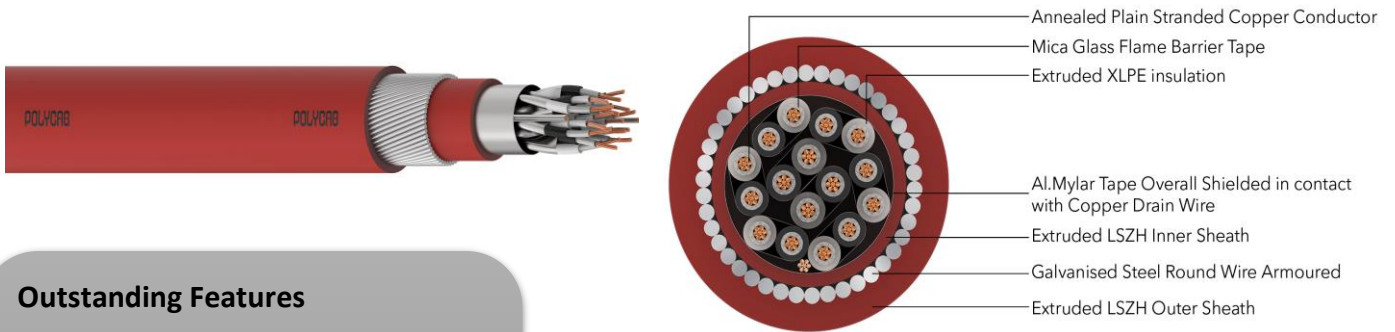

Outstanding Features

- High Resistant to Fire
- Reduced Flame Propagation
- Circuit Integrity when exposed to Fire
- Low Toxicity
- Fire Barrier

Application

POLYCAB FS Multipair Shielded Armoured cable is suitable to use in various indoor & outdoor applications where signal transmission during emergency services during the event of fire, is highly essential and corrosive gas evaluation could be a cause of hazard to the people in high rise building, schools, hospitals, hotels, Malls, Subways etc.

Voltage Rating

300/500V AC

Operation Temperature

-40°C to +90°C

Construction

- Annealed plain stranded copper conductor as per IEC 60228, Class-2.
- Mica Glass flame barrier tape.
- Extruded XLPE insulation.
- Insulated Cores twisted to form pairs and assembled together.
- Al.Mylar Tape Overall Shielded in contact with Drain wire
- Extruded LSZH Inner Sheath
- Galvanised Steel Wire Armoured
- Extruded LSZH Outer Sheath, Colour: Black. (other colour as per request).

Core Identification

- Colour Coding or Number Printing
As per BS EN 50288-7

Bending Radius

Min. 15 x Overall Diameter

Standard Follows:

EN 60228:2005

Generally conforming to BS 7629-1:2015

Test Voltage




2000 V AC at (20±5) °C

Compliance

Fire Resistant	IEC 60331-23
Flame Propagation	EN 60332-1-2
Fire Retardant	EN 60332-3-24 (Cat.C)
Halogen free material	EN 60754-1
Smoke Density	EN 61034-2
Toxicity	NES 02-713



OUR ACCREDITATION



POLYCAB IGNIS 214

Fire Survival Cable, 300/500 V AC

DIMENSIONS AND WEIGHTS:

Product code	No. of Pairs	No. of Cores	Cross Sectional Area (mm ²)	Min. Insulation Thickness (mm)	Dia. over Armour (mm)	Approx. Cable Overall Dia. (mm)	Cable Weight Approx. (kg / km)
FSBS04CXSWLS001P.75SA001P	1	2	0.75	0.44	9.3	12.2	290
FSBS04CXSWLS002P.75SA001P	2	4	0.75	0.44	12.9	15.7	470
FSBS04CXSWLS005P.75SA001P	5	10	0.75	0.44	16.1	20.8	665
FSBS04CXSWLS010P.75SA001P	10	20	0.75	0.44	23.1	26.2	1085
FSBS04CXSWLS015P.75SA001P	15	30	0.75	0.44	26.3	30.6	1440
FSBS04CXSWLS020P.75SA001P	20	40	0.75	0.44	30.0	34.3	1820
FSBS04CXSWLS001P1.0SA001P	1	2	1.0	0.44	9.7	12.6	315
FSBS04CXSWLS002P1.0SA001P	2	4	1.0	0.44	13.5	17.4	510
FSBS04CXSWLS005P1.0SA001P	5	10	1.0	0.44	17.8	22.4	810
FSBS04CXSWLS010P1.0SA001P	10	20	1.0	0.44	24.3	28.3	1275
FSBS04CXSWLS015P1.0SA001P	15	30	1.0	0.44	28.4	32.6	1705
FSBS04CXSWLS020P1.0SA001P	20	40	1.0	0.44	31.5	36.2	2045
FSBS04CXSWLS001P1.5SA001P	1	2	1.5	0.44	10.3	13.4	345
FSBS04CXSWLS002P1.5SA001P	2	4	1.5	0.44	14.7	18.7	585
FSBS04CXSWLS005P1.5SA001P	5	10	1.5	0.44	19.2	24.0	940
FSBS04CXSWLS010P1.5SA001P	10	20	1.5	0.44	26.4	30.8	1525
FSBS04CXSWLS015P1.5SA001P	15	30	1.5	0.44	30.9	35.4	2040
FSBS04CXSWLS020P1.5SA001P	20	40	1.5	0.44	34.6	39.8	2595

ELECTRICAL CHARACTERISTICS:



Cross Sectional Area (mm ²)	Conductor Resistance (Ohms/Km)		Insulation Resistance (MOhms-Km)	Approx. Capacitance (nF/km)	Approx. Inductance to Resistance ratio, L/R (μH/Ohm)
	Single pair	Multi pair			
0.75	34.5	35.2	1000	150	25
1.0	18.1	18.5	1000	150	25
1.5	12.1	12.3	1000	150	40

OUR ACCREDITATION



POLYCAB IGNIS 215

Fire Survival Cable, 300/500 V AC

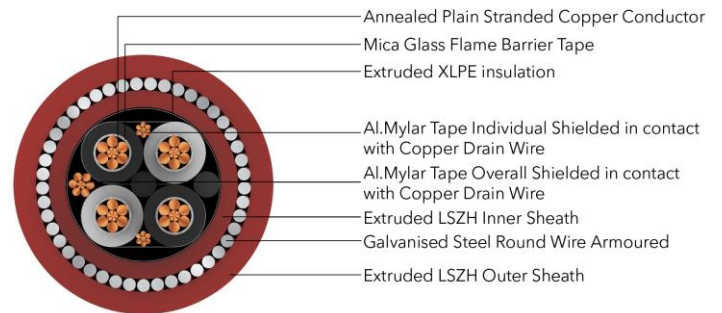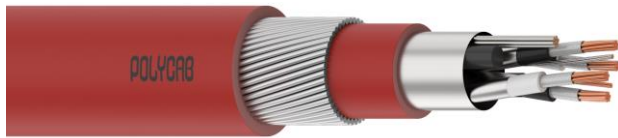

Outstanding Features

- High Resistant to Fire
- Reduced Flame Propagation
- Circuit Integrity when exposed to Fire
- Low Toxicity
- Fire Barrier

Application

POLYCAB FS Multipair Individual & Overall Shielded Armoured cable is suitable to use in various indoor & outdoor applications where signal transmission during emergency services during the event of fire, is highly essential and corrosive gas evaluation could be a cause of hazard to the people in high rise building, schools, hospitals, hotels, Malls, Subways etc.

Voltage Rating

300/500V AC

Operation Temperature

-40°C to +90°C

Construction

- Annealed plain stranded copper conductor as per IEC 60228, Class-2.
- Mica Glass flame barrier tape.
- Extruded XLPE insulation.
- Insulated Cores twisted to form pairs
- Al.Mylar Tape Individual Shielded in contact with Drain wire
- Shielded Pairs assembled together
- Al.Mylar Tape Overall Shielded in contact with Drain wire
- Extruded LSZH Inner Sheath
- Galvanised Steel Round Wire Armoured
- Extruded LSZH Outer Sheath, Colour: Red or White (other colour as per request).

Core Identification

- Colour Coding or Number Printing
As per BS EN 50288-7

Bending Radius

Min. 15 x Overall Diameter

Standard Follows:

EN 60228:2005

Generally conforming to BS 7629-1:2015

Test Voltage




2000 V AC at (20±5) °C

Compliance

Fire Resistant	EN 50200 PH 120
Flame Propagation	EN 60332-1-2
Fire Retardant	EN 60332-3-24 (Cat.C)
Halogen free material	EN 60754-1
Smoke Density	EN 61034-2
Toxicity	NES 02-713



OUR ACCREDITATION



POLYCAB IGNIS 215

Fire Survival Cable, 300/500 V AC

DIMENSIONS AND WEIGHTS:

Product code	No. of Pairs	No. of Cores	Cross Sectional Area (mm ²)	Min. Insulation Thickness (mm)	Dia. over Armour (mm)	Approx. Cable Overall Dia. (mm)	Cable Weight Approx. (kg / km)
FSBS04CXSWLS001P0.5SA001P	1	2	0.50	0.45	8.50	11.3	265
FSBS04CXSWLS002P0.5SA001P	2	4	0.50	0.45	12.6	15.6	430
FSBS04CXSWLS001P.75SA001P	1	2	0.75	0.45	9.10	11.9	290
FSBS04CXSWLS002P.75SA001P	2	4	0.75	0.45	13.3	16.3	465
FSBS04CXSWLS001P1.0SA001P	1	2	1.0	0.45	9.50	12.3	305
FSBS04CXSWLS002P1.0SA001P	2	4	1.0	0.45	13.9	16.9	500
FSBS04CXSWLS001P1.5SA001P	1	2	1.5	0.45	10.1	12.9	340
FSBS04CXSWLS002P1.5SA001P	2	4	1.5	0.45	15.2	18.4	575
FSBS04CXSWLS001P2.5SA001P	1	2	2.5	0.5	10.9	14.0	370
FSBS04CXSWLS002P2.5SA001P	2	4	2.5	0.5	16.7	19.9	665

ELECTRICAL CHARACTERISTICS:


Cross Sectional Area (mm ²)	Conductor Resistance (Ohms/Km)		Insulation Resistance (MOhms-Km)	Approx. Capacitance (nF/km)	Approx. Inductance to Resistance ratio, L/R (μH/Ohm)
	Single pair	Multi pair			
0.50	36	36.7	1000	150	25
0.75	34.5	35.2	1000	150	25
1.0	18.1	18.5	1000	150	25
1.5	12.1	12.3	1000	150	40
2.5	7.41	7.56	1000	150	40

OUR ACCREDITATION



POLYCAB IGNIS 240

Fire Survival Cable, 450/750 V AC

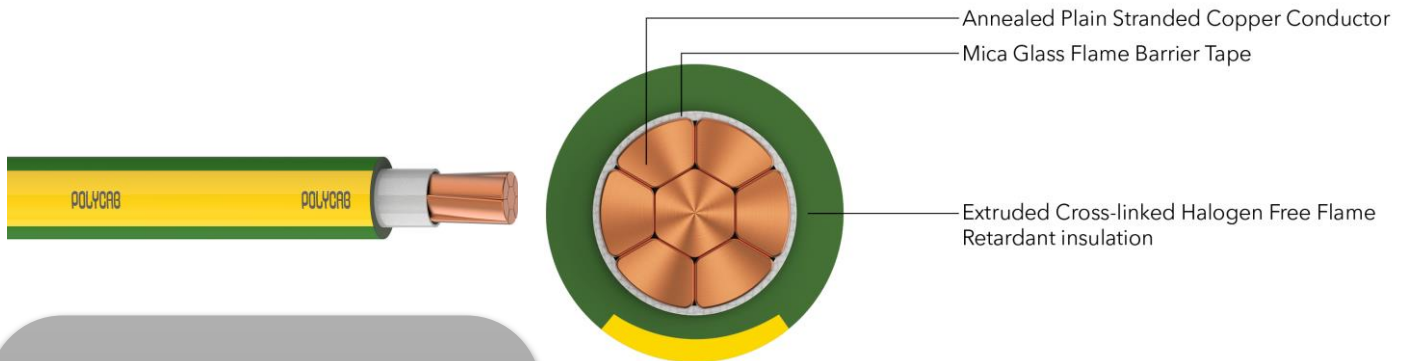

Outstanding Features

- High Resistant to Fire
- Halogen Free
- Reduced Flame Propagation
- Circuit Integrity when exposed to Fire
- Low Toxicity
- Fire Barrier

Application

POLYCAB FS Single Core cable is suitable to use in various indoor & outdoor applications such as tunnels, high rise building, schools, hospitals, hotels, Malls, Subways for emergency lighting during the event of fire.

Voltage Rating

450/750V AC
Can be extended to 1000V

Operation Temperature

-20°C to +90°C
Short Circuit Temperature 250°C

Construction

- Annealed plain stranded copper conductor as per IEC 60228, Class-2.
- Mica Glass flame barrier tape.
- Extruded Cross-linked Halogen Free Flame Retardant Insulation

Core Colour

Green-Yellow or any mono colour

Bending Radius

Min. 8 x Overall Diameter

Standard Follows:

EN 60228:2005
BS 8592:2016

Compliance

Fire Resistant	IEC 60331-3
Flame Propagation	EN 60332-1-2
Fire Retardant	EN 60332-3 (Cat.C)
Halogen free material	EN 60754-1
Smoke Density	EN 61034-2
Toxicity	NES 02-713



OUR ACCREDITATION



NABL

ABS

IRS

POLYCAB IGNIS 240

Fire Survival Cable, 450/750 V AC

DIMENSIONS AND WEIGHTS:

Product code	No. of Cores	Cross Sectional Area (mm ²)	Approx. Cable Overall Dia. (mm)	Max. Conductor Resistance, DC at 20°C (Ohms/Km)	Max. Conductor Resistance, AC at 90°C (Ohms/Km)	Cable Weight Approx. (kg / km)
FSBS06CLUALS001C1.5SA001P	1	1.5	3.5	12.1	15.4	27
FSBS06CLUALS001C2.5SA001P	1	2.5	4.1	7.41	9.45	40
FSBS06CLUALS001C004SA001P	1	4	4.6	4.61	5.88	55
FSBS06CLUALS001C006SA001P	1	6	5.1	3.08	3.93	75
FSBS06CLUALS001C010SA001P	1	10	6.5	1.83	2.33	120
FSBS06CLUALS001C016SA001P	1	16	7.6	1.15	1.47	180
FSBS06CLUALS001C025SA001P	1	25	9.3	0.727	0.927	280
FSBS06CLUALS001C035SA001P	1	35	10.4	0.524	0.668	380
FSBS06CLUALS001C050SA001P	1	50	12.1	0.387	0.494	510
FSBS06CLUALS001C070SA001P	1	70	13.9	0.268	0.342	715
FSBS06CLUALS001C095SA001P	1	95	16.0	0.193	0.247	950
FSBS06CLUALS001C120SA001P	1	120	17.7	0.153	0.196	1225
FSBS06CLUALS001C150SA001P	1	150	19.8	0.124	0.160	1500
FSBS06CLUALS001C185SA001P	1	185	21.9	0.0991	0.129	1875
FSBS06CLUALS001C240SA001P	1	240	24.7	0.0754	0.0988	2415
FSBS06CLUALS001C300SA001P	1	300	27.5	0.0601	0.0804	3000

ELECTRICAL CHARACTERISTICS:

Current Carrying Capacity (Amperes)											
Air Ambient Temperature - 30°C Conductor operating Temperature - 90°C											
Conductor cross-sectional area	Reference Method A (enclosed in conduit in thermally insulating wall etc.)		Reference Method B (enclosed in conduit on a wall or in trunking etc.)		Reference Method C (clipped direct)		Reference Method F (in free air or on a perforated cable tray etc horizontal or vertical etc) Touching			Reference Method G (in free air) Spaced by one cable diameter	
	2 cables, single-phase AC or DC	3 or 4 cables, three-phase AC	2 cables, single-phase AC or DC	3 or 4 cables, three-phase AC	2 cables, single-phase AC or DC flat and touching	3 or 4 cables, three-phase AC flat and touching or trefoil	2 cables, single-phase AC or DC flat	3 cables, three-phase AC flat	3 cables, three-phase AC trefoil	2 cables, single-phase AC or DC or 3 cables three-phase AC flat	
	Amp.	Amp.	Amp.	Amp.	Amp.	Amp.	Amp.	Amp.	Amp.	Amp.	Amp.
1.5	19	17	23	20	25	23	-	-	-	-	-
4	35	31	42	37	46	41	-	-	-	-	-
6	45	40	54	48	59	54	-	-	-	-	-
10	61	54	75	66	81	74	-	-	-	-	-
16	81	73	100	88	109	99	-	-	-	-	-
25	106	95	133	117	143	130	161	141	135	182	161
35	131	117	164	144	176	161	200	176	169	226	201
50	158	141	198	175	228	209	242	216	207	275	246
70	200	179	253	222	293	268	310	279	268	353	318
95	241	216	306	269	355	326	377	342	328	430	389
120	278	249	354	312	413	379	437	400	383	500	454
150	318	285	393	342	476	436	504	464	444	577	527
185	362	324	449	384	545	500	575	533	510	661	605
240	424	380	528	450	644	590	679	634	607	781	719
300	486	435	603	514	743	681	783	736	703	902	833

The above table is in accordance with Table 4E1A of BS 7671-2018

Current rating de-rating factors for other than 30°C ambient air temperature.


Air Temperature	25	30	35	40	45	50	55	60	65	70	75	80
De-rating factor	1.02	1.00	0.96	0.91	0.87	0.82	0.76	0.71	0.65	0.58	0.50	0.41

OUR ACCREDITATION



POLYCAB FS SC 750V LSZH

Fire Survival Cable, 450/750 V AC

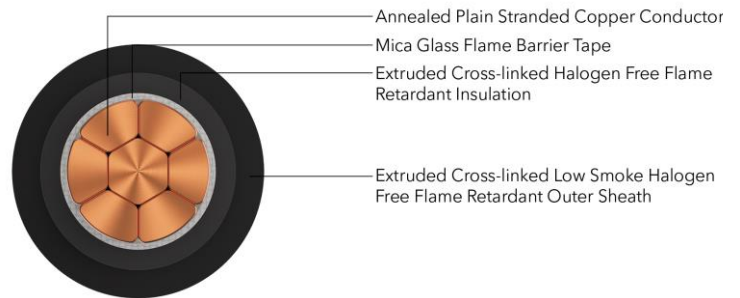

Outstanding Features

- High Resistant to Fire
- Halogen Free
- Reduced Flame Propagation
- Circuit Integrity when exposed to Fire
- Low Toxicity
- Fire Barrier

Application

POLYCAB FS Single Core Sheathed cable is suitable to use in various indoor & outdoor applications such as tunnels, high rise building, schools, hospitals, hotels, Malls, Subways for emergency lighting during the event of fire.

Voltage Rating

450/750V AC
Can be extended to 1000V

Standard Follows:

EN 60228:2005
Generally conforming to BS 7211

Operation Temperature

-40°C to +90°C
Short Circuit Temperature 250°C

Test Voltage:

3500 V AC at (20±5)°C

Construction

- Annealed plain stranded copper conductor as per IEC 60228, Class-2.
- Mica Glass flame barrier tape.
- Extruded Cross-linked Halogen Free Flame Retardant Insulation
- Extruded Cross-linked Low Smoke Halogen Free Flame Retardant Sheath

Compliance

Fire Resistant	IEC 60331-3
Flame Propagation	EN 60332-1-2
Fire Retardant	EN 60332-3 (Cat.C)
Halogen free material	EN 60754-1
Smoke Density	EN 61034-2
Toxicity	NES 02-713

Core Identification



Black or any mono colour



Bending Radius

Min. 8 x Overall Diameter

OUR ACCREDITATION



POLYCAB FS SC 750V LSZH

Fire Survival Cable, 450/750 V AC

DIMENSIONS AND WEIGHTS:

Product Code	No. of Cores	Cross Sectional Area (mm ²)	Approx. Cable Overall Dia. (mm)	Max. Conductor Resistance, DC at 20°C (Ohms/Km)	Max. Conductor Resistance, AC at 90°C (Ohms/Km)	Cable Weight Approx. (kg / km)
FSBS07CLUALS001C004SA001P	1	4.0	6.90	4.61	5.88	80
FSBS07CLUALS001C006SA001P	1	6.0	7.50	3.08	3.93	100
FSBS07CLUALS001C010SA001P	1	10	7.90	1.83	2.33	140
FSBS07CLUALS001C016SA001P	1	16	8.90	1.15	1.47	200
FSBS07CLUALS001C025SA001P	1	25	11.0	0.727	0.927	310
FSBS07CLUALS001C035SA001P	1	35	11.0	0.524	0.668	400
FSBS07CLUALS001C050SA001P	1	50	13.0	0.387	0.494	525
FSBS07CLUALS001C070SA001P	1	70	15.0	0.268	0.342	735
FSBS07CLUALS001C095SA001P	1	95	17.0	0.193	0.247	980
FSBS07CLUALS001C120SA001P	1	120	19.0	0.153	0.196	1250
FSBS07CLUALS001C150SA001P	1	150	20.0	0.124	0.160	1540
FSBS07CLUALS001C185SA001P	1	185	22.0	0.0991	0.129	1890
FSBS07CLUALS001C240SA001P	1	240	25.0	0.0754	0.0988	2500

ELECTRICAL CHARACTERISTICS:


Current Carrying Capacity (Amperes)											Air Ambient Temperature - 30°C	
											Conductor operating Temperature - 90°C	
Conductor cross-sectional area	Reference Method A (enclosed in conduit in thermally insulating wall etc.)		Reference Method B (enclosed in conduit on a wall or in trunking etc.)		Reference Method C (clipped direct)		Reference Method F (in free air or on a perforated cable tray etc horizontal or vertical etc) Touching			Reference Method G (in free air) Spaced by one cable diameter		
	2 cables, single-phase AC or DC	3 or 4 cables, three-phase AC	2 cables, single-phase AC or DC	3 or 4 cables, three-phase AC	2 cables, single-phase AC or DC flat and touching	3 or 4 cables, three-phase AC flat and touching or trefoil	2 cables, single-phase AC or DC flat	3 cables, three-phase AC flat	3 cables, three-phase AC trefoil	2 cables, single-phase AC or DC or 3 cables three-phase AC flat		
	Amp.	Amp.	Amp.	Amp.	Amp.	Amp.	Amp.	Amp.	Amp.	Horizontal Amp.	Vertical Amp.	
4.0	35	31	42	37	46	41	-	-	-	-	-	
6.0	45	40	54	48	59	54	-	-	-	-	-	
10	61	54	75	66	81	74	-	-	-	-	-	
16	81	73	100	88	109	99	-	-	-	-	-	
25	106	95	133	117	143	130	161	141	135	182	161	
35	131	117	164	144	176	161	200	176	169	226	201	
50	158	141	198	175	228	209	242	216	207	275	246	
70	200	179	253	222	293	268	310	279	268	353	318	
95	241	216	306	269	355	326	377	342	328	430	389	
120	278	249	354	312	413	379	437	400	383	500	454	
150	318	285	393	342	476	436	504	464	444	577	527	
185	362	324	449	384	545	500	575	533	510	661	605	
240	424	380	528	450	644	590	679	634	607	781	719	

The above table is in accordance with Table 4E1A of BS 7671-2018

Current rating de-rating factors for other than 30°C ambient air temperature.


Air Temperature	25	30	35	40	45	50	55	60	65	70	75	80
De-rating factor	1.02	1.00	0.96	0.91	0.87	0.82	0.76	0.71	0.65	0.58	0.50	0.41

OUR ACCREDITATION



POLYCAB IGNIS 242

Fire Survival Cable, 600/1000 V AC

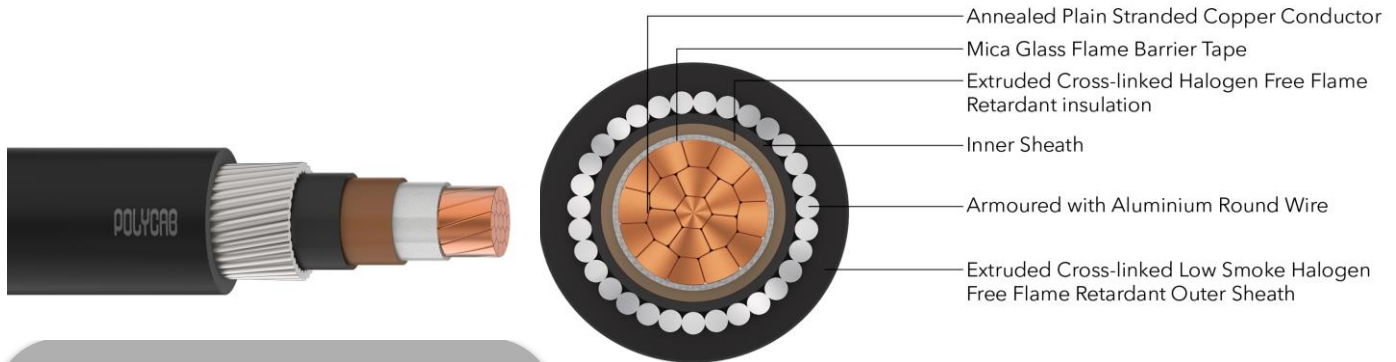

Outstanding Features

- High Resistant to Fire
- Halogen Free
- Reduced Flame Propagation
- Circuit Integrity when exposed to Fire
- Low Toxicity
- Fire Barrier

Application

POLYCAB FS Single Core Armoured and Sheathed cable is suitable to use in various indoor & outdoor applications such as tunnels, high rise building, schools, hospitals, hotels, Malls, Subways for emergency lighting during the event of fire.

Voltage Rating

600/1000V AC

Bending Radius

Min. 8 x Overall Diameter

Operation Temperature

-20°C to +90°C

Short Circuit Temperature 250°C

Standard Follows:

EN 60228:2005

Generally conforming to BS 6724

Construction

- Annealed plain stranded copper conductor as per IEC 60228, Class-2.
- Mica Glass flame barrier tape.
- Extruded Cross-linked Halogen Free Flame Retardant Insulation
- Inner sheath
- Armoured with Aluminium round wire
- Extruded Cross-linked Low Smoke Halogen Free Flame Retardant Sheath

Test Voltage:

3500 V AC at (20±5)°C

Compliance



Fire Resistant	IEC 60331-3
Flame Propagation	EN 60332-1-2
Fire Retardant	EN 60332-3 (Cat.C)
Halogen free material	EN 60754-1
Smoke Density	EN 61034-2
Toxicity	NES 02-713

Core Colour

Brown or Blue



OUR ACCREDITATION



POLYCAB IGNIS 242

Fire Survival Cable, 600/1000 V AC

DIMENSIONS AND WEIGHTS:

Product Code	No. of Cores	Cross Sectional Area (mm ²)	Approx. Cable Overall Dia. (mm)	Max. Conductor Resistance, DC at 20°C (Ohms/Km)	Max. Conductor Resistance, AC at 90°C (Ohms/Km)	Cable Weight Approx. (kg / km)
FSBS07CLAWLS001C050SA001P	1	50	18.4	0.387	0.494	760
FSBS07CLAWLS001C070SA001P	1	70	20.8	0.268	0.342	1050
FSBS07CLAWLS001C095SA001P	1	95	23.0	0.193	0.247	1340
FSBS07CLAWLS001C120SA001P	1	120	24.6	0.153	0.196	1620
FSBS07CLAWLS001C150SA001P	1	150	27.5	0.124	0.160	2035
FSBS07CLAWLS001C185SA001P	1	185	30.0	0.0991	0.129	2470
FSBS07CLAWLS001C240SA001P	1	240	33.8	0.0754	0.0988	3060
FSBS07CLAWLS001C300SA001P	1	300	36.4	0.0601	0.0804	3715
FSBS07CLAWLS001C400SA001P	1	400	41.1	0.0470	0.0647	4830
FSBS07CLAWLS001C500SA001P	1	500	45.0	0.0366	0.0527	5930
FSBS07CLAWLS001C630SA001P	1	630	49.7	0.0283	0.0434	7400

ELECTRICAL CHARACTERISTICS:

Current Carrying Capacity (Amperes)											
Air Ambient Temperature - 30°C Conductor operating Temperature - 90°C											
Conductors cross-sectional area	Reference method C (clipped direct)		Reference Method F (in free air or on a perforated cable tray, horizontal or vertical)								
	2 cables single-phase a.c or d.c flat	3 or 4 cables, three phase a.c flat	Touching			Spaced by one cable diameter					
			2 cables single phase a.c or d.c flat	3 cables single phase a.c flat	3 cables three phase a.c trefoil	2 cables, d.c		2 cables, single-phase a.c		3 or 4 cables, three phase a.c	
(mm ²)	Amp.	Amp.	Amp.	Amp.	Amp.	Amp.	Amp.	Amp.	Amp.	Amp.	Amp.
50	237	220	253	232	222	284	270	282	266	288	266
70	303	277	322	293	285	356	349	357	337	358	331
95	367	333	389	352	346	446	426	436	412	425	393
120	425	383	449	405	402	519	497	504	477	485	449
150	488	437	516	462	463	600	575	566	539	549	510
185	557	496	587	524	529	688	680	643	614	618	574
240	656	579	689	612	625	815	782	749	714	715	666
300	755	662	792	700	720	943	906	842	805	810	755
400	853	717	899	767	815	1137	1094	929	889	848	797
500	962	791	1016	851	918	1314	1266	1032	989	923	871
630	1082	861	1146	935	1027	1528	1474	1139	1092	992	940

The above table is in accordance with Table 4E3A of BS 7671-2018

Current rating de-rating factors for other than 30°C ambient air temperature.

Air Temperature	25	30	35	40	45	50	55	60	65	70	75	80
De-rating factor	1.02	1.00	0.96	0.91	0.87	0.82	0.76	0.71	0.65	0.58	0.50	0.41

OUR ACCREDITATION

